



GOVERNMENT OF TAMIL NADU

Public Works Department

Name of work:

Construction of 3 Class rooms building in Government
Higher Secondary School at A.Mithravayal in
Sivagangai district.

Est. Rs: 74.22 Lakhs.

BUILDINGS (C&M) DIVISION,
SIVAGANGAI.



PUBLIC WORKS DEPARTMENT
OFFICE OF THE SUPERINTENDING ENGINEER, PWD,
BUILDINGS (C&M) CIRCLE, SIVAGANGAI.
TECHNICAL SANCTION SLIP

NAME OF WORK:	"CONSTRUCTION OF 3 CLASSROOM BUILDING IN GOVERNMENT HIGHER SECONDARY SCHOOL AT A.MITHRAVAYAL IN SIVAGANGAI DISTRICT."
REF:	1. THE PRINCIPAL SECRETARY, SCHOOL EDUCATION, CHENNAI LR.NO.: EFILE/ 2806 & 3986/ SSA1/2025 DATED: 04.06.2025 AND 04.07.2025. 2. THE ENGINEER-IN-CHIEF, AND THE CHIEF ENGINEER, (GENERAL) PWD., CHEPAUK, CHENNAI LR.NO.: AEE/T4/017773, DATED: 10.07.2025. 3. THE EXECUTIVE ENGINEER.PWD, BUILDING (C & M) DIVISION, SIVAGANGAI LR.NO.:DB/JDO/2025/C.23/DATED:14.07.2025

IN THE REFERENCE LETTER.1stCITED ABOVE, NECESSARY ADMINISTRATIVE SANCTION HAS BEEN ACCORDED FOR THE "CONSTRUCTION OF 3 CLASSROOM BUILDING IN GOVERNMENT HIGHER SECONDARY SCHOOL AT A.MITHRAVAYAL IN SIVAGANGAI DISTRICT." FOR AN AMOUNT OF Rs.74,22,000/-

ACCORDINGLY, THE DETAILED ESTIMATE HAS BEEN PREPARED BY THE EXECUTIVE ENGINEER, PWD, BUILDINGS (C&M) DIVISION, SIVAGANGAI BASED ON THE CA PLAN JOB NO: A 25/ 8607/ DRG.No:01 AND BY ADOPTING THE SCHEDULE OF RATES FOR THE YEAR 2024-2025. THE EXPENDITURE IS CHARGEABLE UNDER THE HEAD OF ACCOUNT.

THE DETAILED ESTIMATE IS TECHNICALLY SANCTIONED FOR RS.74,22,000/- (RUPEES SEVENTY FOURLAKHS AND TWENTY TWO THOUSAND ONLY)AND REGISTERED IN CIRCLE REGISTER NO.SE/2025-2026


SUPERINTENDING ENGINEER, PWD,
BUILDINGS (C&M) CIRCLE, SIVAGANGAI.


14/7/25 14.7.25

Report to accompany the estimate for the work of Construction of 3 class rooms building in Government Higher Secondary School at A.Mithravayal in Sivagangai District.

Est. Amount Rs: 74.22 lakhs.

The Engineer in Chief, P.W.D., Chennai Letter no: AEE/T4/017773 Dated 10.07.2025 Had instructed that the Nabard RIDF XXXI phase has proposed for Administrative sanction for 642 schools for the year 2025-2026 in continuation based on the principal secretary, school education, Chennai letter no: efile / 2806 & 3986 / SSA1 / 2025 Dated :04.06.2025 and 04.07.2025 requested to initiate the process of tendering to commence the work earlier so as per the above communication the work included in the proposal of school in the list of serial number: 354 For construction of three classroom for the amount of Rs.74.22 lakhs so based on that the discussion made with Head master, Government Hr. Sec. School, A.Mithravayal, the location identified and the detailed estimate prepared with following provisions for the Chief Architect plan CA job no:A-25/8607 With plinth area of Ground floor 204.90 Sq.m.

The building is proposed as framed structure for G+2 floors as ultimate with the following provisions.

Foundation and Basement:

The foundation is proposed at 2.40m below ground level for safe bearing capacity of 150 kN/m². Isolated footings of M20 Grade are proposed. The basement height is proposed as 0.90m from the existing ground level. Filling with excavated earth to a depth of 0.20m, conveyed earth to a depth of 0.45m and Stone dust to a depth of 0.15m are proposed.

Super Structure:

The Superstructure is proposed in Brick work in CM 1:6 using country bricks. The sill slab, lintel and sunshade are proposed with M20 concrete. The Roof height is proposed as 3.60m. The roof slab has been proposed ^{150mm}~~130mm~~ for rooms and corridor with M20 grade of concrete and Fe500 grade of steel.

Roof slab:

RCC M20 Grade using 20 mm gauge HBGS jelly and 10-12mm gauge HBGS jelly is to be used for roof slab. The roof slab top will be finished with pressed tiles over weathering course.

Flooring:

Kota stone slab flooring are proposed for classroom and Antiskid Step tiles are proposed for Entrance steps and ramp portion.

Door and Windows:

Steel sheeted doors and steel window cum emergency doors are proposed. The with Steel sheeted three leaves windows are proposed.

Finishing:

The exposed surfaces of RCC items are to be finished with special ceiling plastering with cement mortar 1:3, 10 mm thick. The brick walls are to be finished with cement mortar 1:5, 12mm thick.

Painting:

Painting two coats of newly plastered interior and exterior wall surface with ready mixed plastic emulsion paint over a primer. Painting iron works with synthetic enamel paint over red oxide priming coat.

The following lump sum provisions are made in this estimate.

- Provision for Internal and External Electrification (including GST)
- Provision for EB Service connection
- Provision for Soil Investigation
- Provision for Rain water Harvesting and additional amenities
- Provision for Front elevation
- Provision for Tender Advertisement charges
- Provision for LPA charges
- Provision for Photographic charges & documentation charges
- Provision for Inaugural function, foundation stone laying
- Provision for Labour welfare fund @ 1%
- Provision for P.S charges and Contingencies
- Provision for Unforeseen item of works

The estimate has been prepared based on current Schedule of rates for the year 2024-25 and amount works out be Rs.74,22,000/- The expenditure shall debit in Head of Account.

8-8/14/7/25
Assistant Engineer, P.W.D.,
Buildings (C&M) Section,
Singampunari.

Assistant Executive Engineer P.W.D.,
Buildings (C&M) Sub Division,
Karaikudi.

Executive Engineer, P.W.D.,
Buildings (C&M) Division,
Sivagangai.

14-7-25
CHIEF EDUCATIONAL OFFICER
SIVAGANGAI - 630 562

Executive Engineer
Electrical Division, PWD,
Sivagangai.

14/7/25
Superintending Engineer, PWD
Buildings (C&M) Circle
Sivagangai - 630 561

14/7/25
Chnh
14-7-25

PUBLIC WORKS DEPARTMENT

From

Er.S.Manivannan, M.E.,
Engineer-in-Chief and
Chief Engineer (General), PWD,
Chepauk, Chennai-600 005.

To

1. The Chief Engineer, PWD,
Chennai Region, Chennai.
2. The Chief Engineer, PWD,
Trichy Region, Trichy.
3. The Chief Engineer, PWD,
Madurai Region, Madurai.
4. The Chief Engineer, PWD,
Coimbatore Region, Coimbatore.

LT.No. AEE/T4-School - RIDF 31 / 017773 / 2025, dated: 10.07.2025

Sir,

Sub: PWD - School Education Department - NABARD - Project proposal for providing infrastructure facilities to Government High and Higher Secondary Schools under RIDF XXXI for the year 2025-26 - forwarded to NABARD by School Education - instructions Regarding.


- Ref: 1. The Principal Secretary to Government, School Education Department, Secretariat, Chennai-9, Ir no. (efile) 2806 / SSA1 / 2025-4, dt: 04.06.2025.
2. The Principal Secretary to Government, School Education Department, Secretariat, Chennai-9, Ir no. (efile) 3986 / SSA1 / 2025-2, dt: 04.07.2025.

* *****

With reference to the above letters cited, the Principal Secretary to Government, School Education Department has stated that the action is being taken for issuance of administrative sanction for the work of providing infrastructure facilities like additional classrooms, laboratories, toilets, drinking water and compound wall to 642 (566 + 1 model School + 75) Government High and Higher Secondary Schools under RIDF XXXI for the year 2025-26 and also requested to initiate the process of tendering and commencement of works.

In this regard, the Chief Engineers are requested to instruct the concerned Engineers to take immediate necessary action to initiate the process of tendering as per the instructions of Principal Secretary to Government, School Education Department.

Encl: Copy of reference letters &
List of School buildings.


For Engineer-in-Chief &
Chief Engineer (General),
PWD, Chepauk, Chennai-5

Copy to all the Superintending Engineer, PWD.

Copy to all the Executive Engineer, PWD.



School Education Department,
Secretariat, Chennai-9.

Letter No. (efile) 2806 / SSA1 / 2025 - 4, Dated: 04.06.2025

From
Dr. Chandra Mohan. B, I.A.S.,
Principal Secretary to Government.

To
The Engineer-in-Chief and Chief Engineer (General),
Public Works Department,
Chepauk, Chennai - 5. (w.e.)

Sir,

Sub: School Education - NABARD - Project Proposal for providing infrastructure facilities to Government Primary, Middle, High and Higher Secondary Schools under RIDF-XXXI for the year 2025-26 - Forwarded to NABARD - Communicated - Instructions - Regarding.


Ref: 1. From the Director of Elementary Education, letter R.c.No.13071/K4/2025, Dated 21.03.2025.
2. From the Director of Schools Education, letter Rc.No.012088/N2/E2/2025, dated 03.04.2025 and 04.04.2025.
3. Government Letter No.e-office-2806/ Finance(Res-II)/2025, dated 28.05.2025.

I enclose a copy of the reference 3rd cited and state that action is being taken for issuance of administrative sanction for an amount of Rs.84526.53 lakh for providing infrastructure facilities like additional Class rooms, Laboratories, Toilets, Drinking Water and Compound wall to 748 Government Primary /Middle/ High and Higher Secondary Schools and construction of classrooms and Hostels for Boys and Girls for Model School in Perambalur District under NABARD, RIDF-XXXI for the year 2025-26.

2. The Director of School Education and DEE has been requested to submit the Detailed Project Report for the above said project to NABARD through RIDF Web portal to consider for sanction of loan under NABARD Assisted scheme, RIDF-XXXI for the year 2025-26, at the earliest.

3. I request you to initiate the process of tendering and commencement of works and intimate action taken in this regard to Government.

Yours faithfully,



for Principal Secretary to Government

Copy to:

The Director of School Education, Chennai – 6. (w.e.)

The Director of Elementary Education, Chennai – 6. (w.e.)

3. I request you to initiate the process of tendering and commencement of works and intimate action taken in this regard to Government.

Yours faithfully,

for Principal Secretary to Government

Copy to:

The Director of School Education, Chennai – 6. (w.e.)

The Director of Elementary Education, Chennai – 6. (w.e.)



School Education Department,
Secretariat, Chennai-9.

Letter No. (efile) 3986 / SSA1 / 2025 - 2, Dated: 04.07.2025

From
Dr. Chandra Mohan. B, I.A.S.,
Principal Secretary to Government.

To
The Engineer-in-Chief and Chief Engineer (General),
Public Works Department,
Chepauk, Chennai - 5. (w.e.)

Sir,

Sub: School Education - NABARD - Project Proposal for providing infrastructure facilities to Government High and Higher Secondary Schools under RIDF-XXXI for the year 2025-26 - Forwarded to NABARD - Communicated - Instructions - Regarding.

Ref: 1. From the Director of Schools Education, letter Rc. No.012088/N2/E2/2025, dated 09.05.2025.
2. Government Letter No.e-3986/Res-II/2025, Finance Department, dated 30.06.2025.

I am to enclose a copy of the reference 2 nd cited and state that action is being taken for issuance of administrative sanction for an amount of Rs.8064.49 lakh for providing infrastructure facilities like additional Class rooms, Laboratories, Toilets, Drinking Water and Compound wall to 75 Government High and Higher Secondary Schools under NABARD, RIDF-XXXI for the year 2025-26.(School list is annexed in this letter).

2. The Director of School Education has been requested to submit the Detailed Project Report for the above said project to NABARD through RIDF Web portal to consider for sanction of loan under NABARD Assisted scheme, RIDF-XXXI for the year 2025-26.

3. I am therefore request you to initiate the process of tendering and commencement of works and intimate action taken in this regard to Government.

Yours faithfully,

for Principal Secretary to Government.

Copy to:

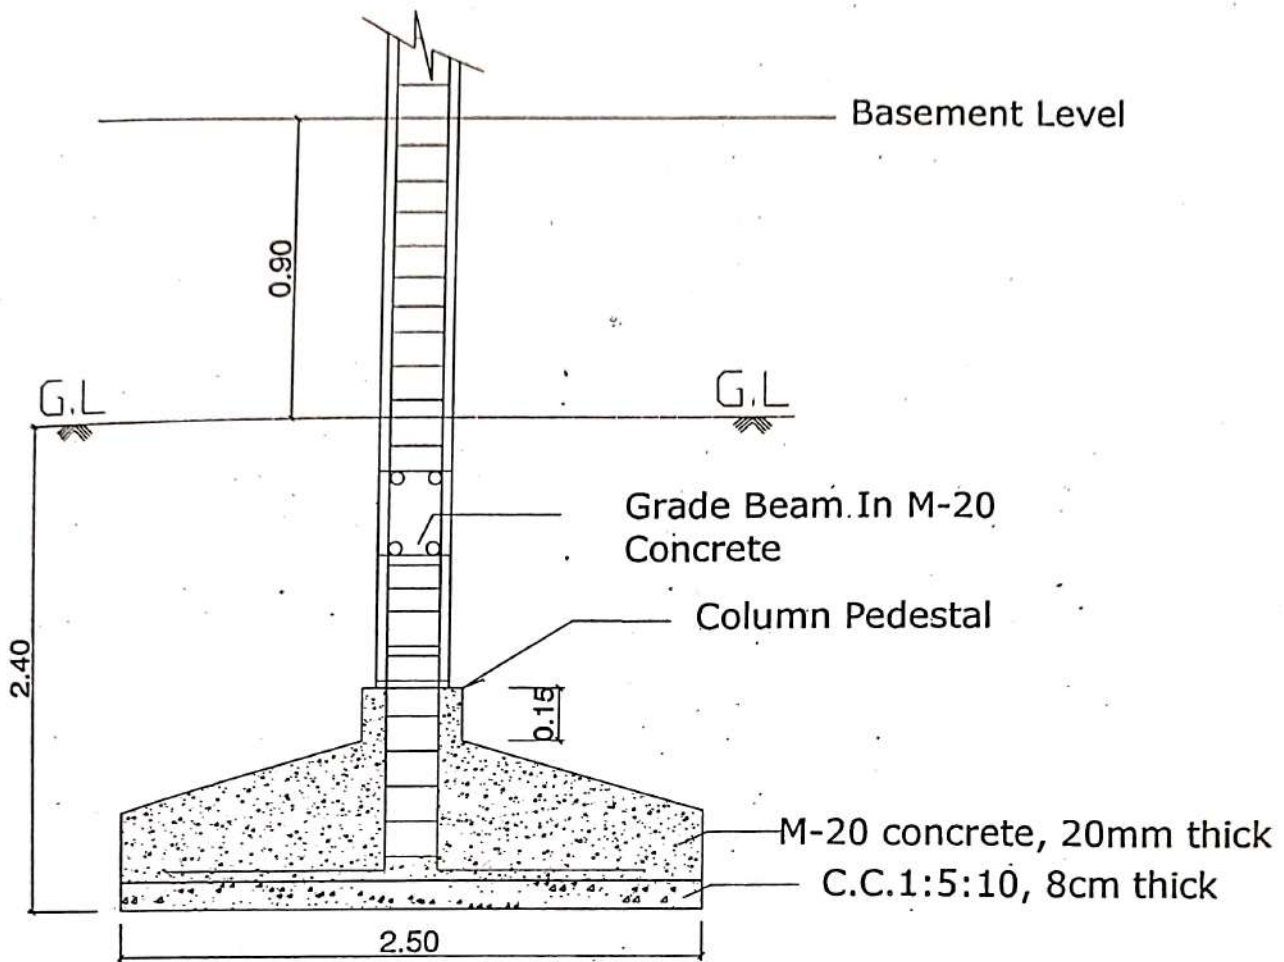
The Director of School Education, Chennai - 6. (w.e.)

S. No	District	LOUSE	School Name	Student Strength	Proposed Classroom	Classroom Amount	Total Classroom Amount	HSS Lab Propos ed	Lab Amount	Total Lab Amount	Proposed BT	Boys Total Amount	Total Boys Amount	Processed OT	Girls Total Amount	Total Girls Amount	Proposed Owing Year	OT Amount	Total OT Amount	Proposed DW	DW Amount	Total DW Amount	Proposed Compound Wall (in Meters)	Compound Wall Amount	Total Compound Wall Amount
1	ARIYALLUR	33320103603	GHSS-KARAKURICH	658	4	24.74	98.06	1	64.47	64.47															
2	ARIYALLUR	33320503905	GHSS MODEL SCHOOL-SENDAIRAI	771	7	24.74	173.18				1	9.83	9.83												
3	ARIYALLUR	33320804402	GHSS MELAKKUDH	766	4	24.74	98.06																		
4	ARIYALLUR	33320702405	GOVT HR SEC SCHOOL KARUNOYYUR	816	2	24.74	49.48																		
5	ARIYALLUR	33320703004	GHSS SUNDALU	845	2	24.74	49.48																		
6	ARIYALLUR	33320701100	GHSS MODEL SCHOOL ANTHANIPURAM	494	2	24.74	49.48																		
7	ARIYALLUR	33320806502	GHSS LUKOTTAI	472	2	24.74	49.48																		
8	ARIYALLUR	33320700302	GHSS POTTAIYANMALLUR	587	2	24.74	49.48																		
9	ARIYALLUR	33320702003	GHSS KAMBANUR	364	3	24.74	74.22																		
10	ARIYALLUR	33320803104	GHSS MARUDUR	360	2	24.74	49.48																		
11	ARIYALLUR	33320801203	GHSS EDAPAKURICH	352	2	24.74	49.48																		
12	ARIYALLUR	33320801302	GOVT HR SEC SCHOOL TIYUR	311	2	24.74	49.48																		
13	ARIYALLUR	33320502203	GHSS-RUMBALKURICH	269	2	24.74	49.48																		
14	ARIYALLUR	33320703003	GHSS ARUNQAL	262	2	24.74	49.48																		
15	ARIYALLUR	33320805004	GHSS VARANAVASI	202	3	24.74	74.22																		
16	CHENGALPATTU	33030701503	GOVT HR SEC SCHOOL KANDIGAI 600127	1056	0	24.74	222.08																		
17	CHENGALPATTU	33031003603	GOVERNMENT HIGHER SECONDARY SCHOOL ORATHI	919	3	24.74	74.22																		
18	CHENGALPATTU	33030601709	Govt Higher Secondary School KOVALAM	882	6	24.74	148.44																		
19	CHENGALPATTU	33031402606	GOVT HIGH SCHOOL SITHALAPAKKAM	831	2	24.74	49.48																		
20	CHENGALPATTU	33031402804	GHSS THIRUVANCHERY	766	5	24.74	123.7																		
21	CHENGALPATTU	33030601503	GHSS KELAMBAKKAM	751	8	24.74	197.92																		
22	CHENGALPATTU	33031404107	GHSS NAMANGALAM	723	6	24.74	123.7																		
23	CHENGALPATTU	33031001602	GOVERNMENT HIGHER SECONDARY SCHOOL LENDATHUR	666	0	24.74	148.44																		
24	CHENGALPATTU	33031203303	GHSS KUVATHUR	810	2	24.74	49.48																		
25	CHENGALPATTU	33031204104	GHSS AVAKUT	595	3	24.74	74.22																		
26	CHENGALPATTU	33030808501	GHSS MAHALLAPURAM	560	2	24.74	49.48																		
27	CHENGALPATTU	33031304906	GOVERNMENT GIRLS HIGHER SECONDARY SCHOOL - KADAPPAKKAM	535	4	24.74	98.96																		
28	CHENGALPATTU	33031402412	GHSS PERUMBIAKKAM	534	5	24.74	123.7																		
29	CHENGALPATTU	33031305302	GOVERNMENT HIGHER SECONDARY SCHOOL VEDANAKUPATTU	528	2	24.74	49.48																		
30	CHENGALPATTU	33030603303	GOVERNMENT HIGHER SECONDARY SCHOOL BEMBAKKAM	525	0	24.74	197.92																		
31	CHENGALPATTU	33031007703	MCBM GOVERNMENT HIGHER SECONDARY SCHOOL PADALAM	619	6	24.74	148.44																		
32	CHENGALPATTU	33030603804	GOVERNMENT HIGH SCHOOL KARUMBIAKKAM	372	5	24.74	123.7																		
33	CHENGALPATTU	33030701102	GHSS ANTHANIPURAM	360	2	24.74	49.48																		
34	CHENGALPATTU	3303104303	GHSS VEDANAKUPAM	269	5	24.74	123.7																		
35	CHENGALPATTU	33031307202	GOVERNMENT HIGH SCHOOL - ANTHANIKOTTU	204	2	24.74	49.48																		
36	COMBATORE	33122702102	GHSS CHENGALPALLAVAM	629	2	24.74	49.48																		

SL No	District	UDISE	School Name	Student Strength	Proposed Classroom	Classroom Amount	Total Classroom Amount	HSS Lab Proposed	Lab Amount	Total Lab Amount	Proposed BT	Boys Total Amount	Total Boys Total Amount	Proposed GT	Girls Total Amount	Total Girls Total Amount	Proposed Drinking Water	Drinking Water Amount	Total DWP Amount	Proposed Compound wall (in meters)	Compound Wall Amount	Total Compound Wall Amount
581	VILLUPURAM	33071207602	GOVERNMENT HIGH SCHOOL SJ PERAMPAT	346	10	24.74	247.4				1	9.83	9.83	1	10.31	10.31	1	4.2	4.2	400	0.1	40
582	VILLUPURAM	33070602602	GOVERNMENT HIGHER SECONDARY SCHOOL MEDMOZHAYANUR	331	2	24.74	49.48				1	9.83	9.83	1	10.31	10.31						
583	VILLUPURAM	33070304204	GOVERNMENT HIGHER SECONDARY SCHOOL ILLODU	304	4	24.74	98.96															
584	VILLUPURAM	33071104003	GOVERNMENT HIGH SCHOOL KUMALAM	238	3	24.74	74.22															
585	VRUDHJANAGAR	33260803304	GOVERNMENT HIGHER SECONDARY SCHOOL THAILAPURAM	598	8	24.74	148.44				1	9.83	9.83									
586	VRUDHJANAGAR	33260311202	GOVERNMENT HIGHER SECONDARY SCHOOL SALAMAKKULAM	539	2	24.74	49.48															
587	VRUDHJANAGAR	33260704403	GHSS VELLAYAPURAM	281	5	24.74	123.7															
			Total		2463	13750.79	61029.69	37	2388	2388.39	119	1172.4	1172.36	101	1043	1043.11	57	240.1	240.12	1564.5	6.872	1894.2

Director of Schools
04.10.2025

FOOTING DETAIL



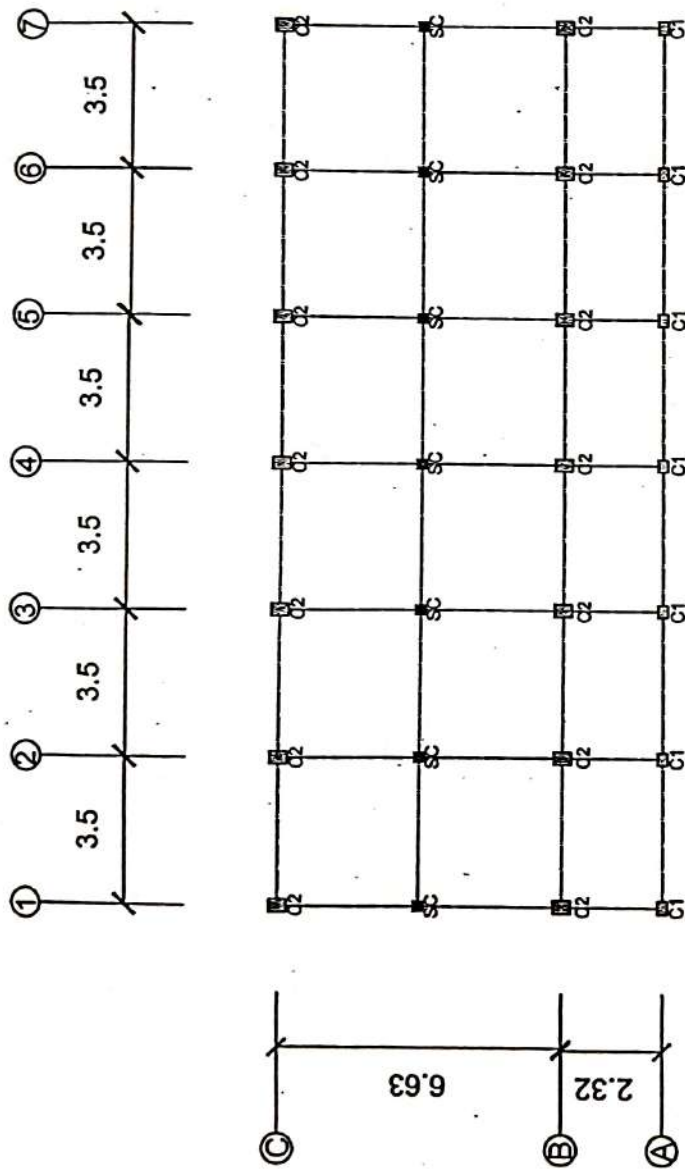
5.8/14/7/25
Assistant Engineer, P.W.D.,
Buildings (C&M) Section,
Singampunari.

Assistant Executive Engineer, P.W.D.,
Buildings (C&M) Sub Division,
Karaikudi.

Executive Engineer, P.W.D.,
Buildings (C&M) Division,
Sivagangai.

14/7/25 14/07/25

3 CLASSROOM



Column Details

- C1-300 X 230 mm (7 Nos)
- C2-300 X 400 mm (14 Nos)
- SC-230 X 230 mm (7 Nos)
(Stub column)

Center line

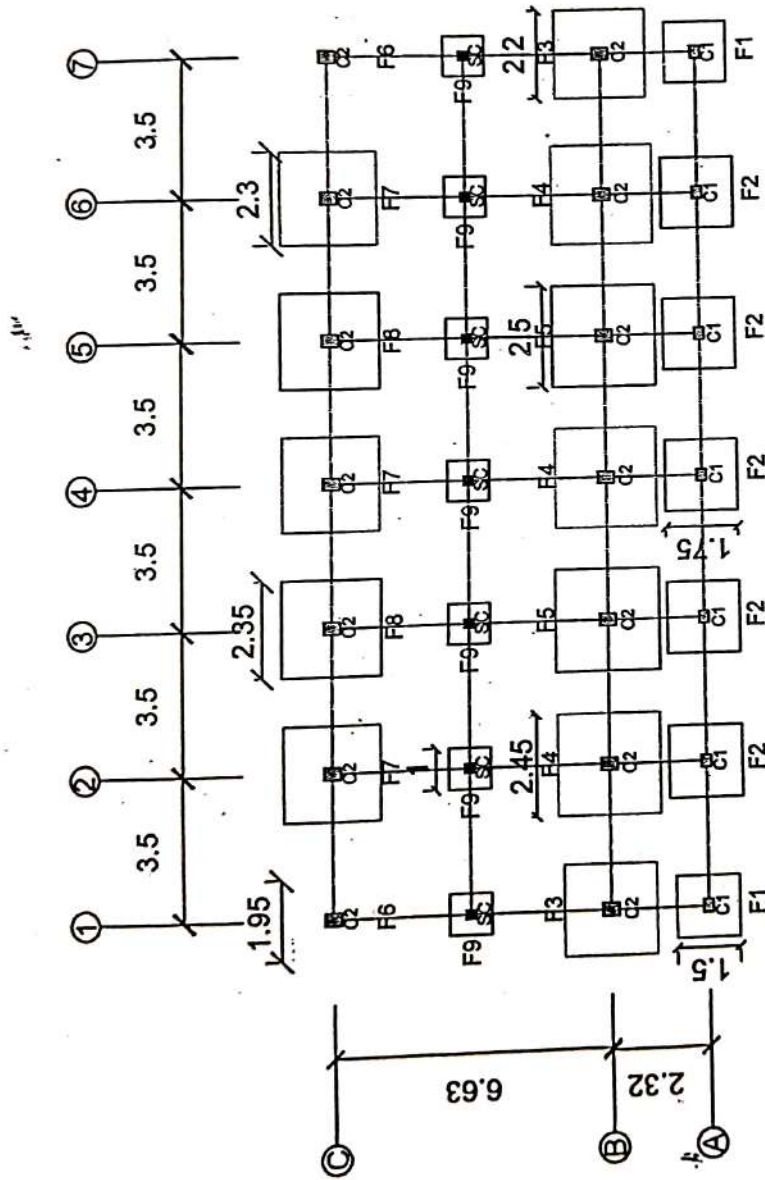
S. S. Muthus
Assistant Engineer, P.W.D.,
Buildings (C&M) Section
Singampunari

S. S. Muthus
Assistant Engineer, P.W.D.,
Buildings (C&M) Sub Division
Karaikudi

S. S. Muthus
Executive Engineer, P.W.D.,
Buildings (C & M) Division
Sivagangai

S. S. Muthus
14/01/91

3 CLASSROOM



Column Details

- C1-300 X 230 mm (7 Nos)
- C2-300 X 400 mm (14 Nos)
- SC-230 X 230 mm (7 Nos)
(Stub column)

Footing Details

- 1) F1 -1500X 1500 mm (2 Nos)
- 2) F2 -1750X 1750 mm (5 Nos)
- 3) F3 -2200X 2200 mm (2 Nos)
- 4) F4 -2450X 2450 mm (3 Nos)
- 5) F5 -2500X 2500 mm (2 Nos)
- 6) F6 -1950X 1950 mm (2 Nos)
- 7) F7 -2300X 2300 mm (3 Nos)
- 8) F8 -2350X 2350 mm (2 Nos)
- 9) F9 -1000X 1000 mm (7 Nos)

Assistant Engineer, P.W.D.,
Buildings (C&M) Section
Sindameunari

Assistant Executive Engineer, P.W.D.,
Buildings (C&M) Division
Karaikudi

Executive Engineer, P.W.D.,
Buildings (C&M) Division
Karaikudi

Name of Work :-

Construction of 3 Class Room Building in Government Higher Secondary School at Mithravayal in Sivagangai District.

Detailed Estimate - 3 classroom - Sub Structure

SI No	Description	Nos			L	B	D	Qty
1	Earthwork excavation for foundation in all soils							
	Footing							
	A1,A7	1	x	2	1.70	1.70	2.40	13.87
	A2,A3,A4,A5,A6	1	x	5	1.95	1.95	2.40	45.63
	C1,C7	1	x	2	2.15	2.15	2.40	22.19
	B1,B7	1	x	2	2.40	2.40	2.40	27.65
	C2,C4,C6	1	x	3	2.50	2.50	2.40	45.00
	C3,C5	1	x	2	2.55	2.55	2.40	31.21
	B2,B4,B6	1	x	3	2.65	2.65	2.40	50.56
	B3,B5	1	x	2	2.70	2.70	2.40	34.99
	Stub column footing							
	SC	1	x	7	1.20	1.20	1.50	15.12
	For Grade beam - X direction							
	GRADE BEAM							
	X direction							
	A1-A2,A6-A7	1	x	2	1.88	0.40	0.73	1.10
	A2-A6	1	x	4	1.75	0.40	0.73	2.04
	B1-B2,B6-B7	1	x	2	1.18	0.40	0.73	0.69
	B2-B6	1	x	4	1.03	0.40	0.73	1.20
	C1-C2,C6-C7	1	x	2	1.38	0.40	0.73	0.81
	C2-C6	1	x	4	1.18	0.40	0.73	1.38
	Y DIRECTION							
	B1-C1, B7-C7	1	x	2	4.56	0.40	0.73	2.66
	B2-C2,B4-C4,B6-C6	1	x	3	4.26	0.40	0.73	3.73
	B3-C3,B5-C5	1	x	2	4.21	0.40	0.73	2.46
	A1-B1,A7-B7	1	x	2	0.47	0.40	0.73	0.27
	A2-B2,A4-B4,A6-B6	1	x	3	0.22	0.40	0.73	0.19
	A3-B3,A5-B5	1	x	2	0.20	0.40	0.73	0.12
	D/f stub column	1	x	7	1.00	0.40	0.73	-2.04
	Ramp Portion							
	platform	1	x	3	1.80	0.40	0.40	0.86
	Step	1	x	1	3.80	1.20	0.30	1.37
								5.20
	Total							310.00 m³

SI No	Description	Nos			L	B	D	Qty
2	Cement concrete 1:5:10 using 40mm HBGS jelly for foundation							
	<u>Footling</u>							
	A1,A7	1	x	2	1.70	1.70	0.08	0.46
	A2,A3,A4,A5,A6	1	x	5	1.95	1.95	0.08	1.52
	C1,C7	1	x	2	2.15	2.15	0.08	0.74
	B1,B7	1	x	2	2.40	2.40	0.08	0.92
	C2,C4,C6	1	x	3	2.50	2.50	0.08	1.50
	C3,C5	1	x	2	2.55	2.55	0.08	1.04
	B2,B4,B6	1	x	3	2.65	2.65	0.08	1.69
	B3,B5	1	x	2	2.70	2.70	0.08	1.17
	<u>Stub column footing</u>							
	SC	1	x	7	1.20	1.20	0.08	0.81
	<u>For Grade beam - X direction</u>							
	3.50M Span	3	x	6	3.20	0.40	0.08	1.84
	<u>For Grade beam - Y direction</u>							
	Span 2.32m	1	x	7	2.00	0.40	0.08	0.45
	Span 6.63m	1	x	7	6.23	0.40	0.08	1.40
	D/f Stub column	1	x	7	0.23	0.40	0.08	-0.05
	Ramp Portion	1	x	1	10.80	0.40	0.10	0.43
	platform	1	x	3	1.80	0.40	0.10	0.22
	Step	1	x	1	3.80	1.20	0.10	0.43
								0.42
	Total							15.00 m ³
3	Supplying and erecting steel centering including necessary supports for plane surfaces for Reinforced Cement Concrete works such as column footings, column pedestals, plinth beams, grade beams, staircase steps, Sill slabs etc. which require only nominal strutting using mild steel sheets of size 90cm x 60cm and 10 BG stiffened with welded mild steel angles of size 25mm x 25mm x 3 mm for boarding, laid with silver oak joists of size 10cm x 7.5cm							
	<u>Footling</u>							
	A1,A7	1	x	2	6.00		0.20	2.40
	A2,A3,A4,A5,A6	1	x	5	7.00		0.20	7.00
	C1,C7	1	x	2	7.80		0.20	3.12
	B1,B7	1	x	2	8.80		0.20	3.52
	C2,C4,C6	1	x	3	9.20		0.20	5.52
	C3,C5	1	x	2	9.40		0.20	3.76
	B2,B4,B6	1	x	3	9.80		0.20	5.88
	B3,B5	1	x	2	10.00		0.20	4.00

SI No	Description	Nos			L	B	D	Qty	
	<u>Stub column footing</u>								
	SC	1	x	7	4.00		0.20	5.60	
	<u>For Grade beam - X direction</u>								
	3.50M Span	3	2	6	3.20	----	0.35	40.32	
	<u>For Grade beam - Y direction</u>								
	Span 2.32m	2	x	7	2.01	----	0.35	9.82	
	Span 6.63m	2	x	7	6.23	----	0.35	30.53	
	D/f Stub column	1	x	7	0.23	----	0.35	-0.56	
	Ramp Portion	1	x	2	10.80	----	0.30	6.48	
	platform	2	x	3	1.57	----	0.30	2.83	
	Step	1	x	2	3.80	----	0.35	2.66	
	<u>For Pedestal</u>								
	Col.30x40cm	1	x	14	1.80	----	0.15	3.78	
	Col.23x30cm	1	x	7	1.46	----	0.15	1.53	
	SC.23x23cm	1	x	7	1.32	----	0.15	1.39	
								2.43	
	Total							142.00	m ²
4	Supplying and erecting centering for plane surfaces such as RCC Floor Slab, Roof Slab, Loft, Landing Slabs, etc with necessary supports and strutting upto 3.60m height in all floors with all cross bracings using MS Sheets made of 10 gauge thick welded with MS angle of Size 25mm x 25mm x 3mm for boarding laid over steel adjustable span of size 2m x 2m (expandable upto 3.60m) and supported by Steel Adjustable Telescopic Props of Size 2m x								
	Structural Slab	1	x	1	60.78	----	0.10	6.08	
								0.02	
	Total							6.10	m ²
4	Supplying and erecting steel centering including necessary supports For plane surfaces such as rectangular or square RCC columns etc. which require only nominal strutting using mild steel sheets made of 10 gauge thick welded with MS angle size 40mm x 40mm x 5 mm and supported by Steel Adjustable Telescopic Props of Size 2m x 2m (expandable upto 3.60m) made with outer steel pipe with dia 50mm (3.60mm thick) and inner steel pipe with								
	<u>For Column from Pedestal top to Basement level</u>								
	A1,A7	1	x	2	1.06	----	2.77	5.87	
	A2,A3,A4,A5,A6	1	x	5	1.06	----	2.67	14.15	
	C1,C7	1	x	2	1.40	----	2.67	7.48	
	B1,B7	1	x	2	1.40	----	2.62	7.34	
	C2,C4,C6	1	x	3	1.40	----	2.57	10.79	
	C3,C5	1	x	2	1.40	----	2.57	7.20	
	B2,B4,B6	1	x	3	1.40	----	2.52	10.58	
	B3,B5	1	x	2	1.40	----	2.52	7.06	

Sl No	Description	Nos			L	B	D	Qty
	Stub column footing							
	SC	1	x	7	0.92	----	1.87	12.04
								2.49
	Total							85.00 m ²
5	Providing and laying in position, standardised concrete Mix M-20 Grade in accordance using 20mm							
a	Foundation & Basement							
	Footing							
	A1,A7	1	x	2	1.50	1.50	0.20	0.90
	Coping	1	x	2	$(0.10/3) \times ((1.50 \times 1.50) + (0.35 \times 0.40) + \text{sq. rt. } V((1.50 \times 1.50) \times (0.35 \times 0.40)))$			0.20
	A2,A3,A4,A5,A6	1	x	5	1.75	1.75	0.20	3.06
	Coping	1	x	5	$(0.20/3) \times ((1.75 \times 1.75) + (0.35 \times 0.40) + \text{sq. rt. } V((1.75 \times 1.75) \times (0.35 \times 0.40)))$			1.29
	C1,C7	1	x	2	1.95	1.95	0.20	1.52
	Coping	1	x	2	$(0.20/3) \times ((1.95 \times 1.95) + (0.35 \times 0.40) + \text{sq. rt. } V((1.95 \times 1.95) \times (0.35 \times 0.40)))$			0.62
	B1,B7	1	x	2	2.20	2.20	0.20	1.94
	Coping	1	x	2	$(0.25/3) \times ((2.20 \times 2.20) + (0.40 \times 0.50) + \text{sq. rt. } V((2.20 \times 2.20) \times (0.40 \times 0.50)))$			1.00
	C2,C4,C6	1	x	3	2.30	2.30	0.20	3.17
	Coping	1	x	3	$(0.30/3) \times ((2.30 \times 2.30) + (0.40 \times 0.50) + \text{sq. rt. } V((2.30 \times 2.30) \times (0.40 \times 0.50)))$			1.96
	C3,C5	1	x	2	2.35	2.35	0.20	2.21
	Coping	1	x	2	$(0.30/3) \times ((2.35 \times 2.35) + (0.40 \times 0.50) + \text{sq. rt. } V((2.35 \times 2.35) \times (0.40 \times 0.50)))$			1.35
	B2,B4,B6	1	x	3	2.45	2.45	0.20	3.60
	Coping	1	x	3	$(0.35/3) \times ((2.45 \times 2.45) + (0.40 \times 0.50) + \text{sq. rt. } V((2.45 \times 2.45) \times (0.40 \times 0.50)))$			2.55

Sl No	Description	Nos			L	B	D	Qty
	B3,B5	1	x	2	2.50	2.50	0.20	2.50
	Coping	1	x	2	$(0.35/3) \times ((2.50 \times 2.50) + (0.40 \times 0.50) + \text{sq. rt. } V((2.50 \times 2.50) \times (0.40 \times 0.50)))$			1.77
	Stub column	1	x	7	1.00	1.00	0.20	1.40
	Coping	1	x	7	$(0.10/3) \times ((1.00 \times 1.00) + (0.35 \times 0.35) + \text{sq. rt. } V((1.00 \times 1.00) \times (0.35 \times 0.35)))$			0.11
	<u>For Grade beam - X direction</u>						31.15	
	3.50M Span	3	x	6	3.20	0.23	0.35	4.64
	<u>For Grade beam - Y direction</u>							
	Span 2.32m	1	x	7	2.00	0.23	0.35	1.13
	Span 6.63m	1	x	7	6.23	0.23	0.35	3.51
	D/f Stub column	1	x	7	0.23	0.23	0.35	-0.13
	<u>Ramp & platform</u>							
	Ramp Portion	1	x	1	10.80	0.23	0.30	0.75
	platform	1	x	3	1.57	0.23	0.30	0.32
	Step	1	x	1	3.80	0.23	0.30	0.26
							10.48	
	<u>For Pedestal</u>							
	Col.30x40cm	1	x	14	0.50	0.40	0.15	0.42
	Col.23x30cm	1	x	7	0.33	0.40	0.15	0.14
	SC.23x23cm	1	x	7	0.33	0.33	0.15	0.11
	<u>For Column from Pedestal top to Basement level</u>							
	A1,A7	1	x	2	0.23	0.30	2.77	0.38
	A2,A3,A4,A5,A6	1	x	5	0.23	0.30	2.67	0.92
	C1,C7	1	x	2	0.30	0.40	2.67	0.64
	B1,B7	1	x	2	0.30	0.40	2.62	0.63
	C2,C4,C6	1	x	3	0.30	0.40	2.57	0.93
	C3,C5	1	x	2	0.30	0.40	2.57	0.62
	B2,B4,B6	1	x	3	0.30	0.40	2.52	0.91
	B3,B5	1	x	2	0.30	0.40	2.52	0.60


SI No	Description	Nos			L	B	D	Qty
	Stub column footing							
	SC	1	x	7	0.23	0.23	1.87	0.69
							6.99	
	Structural Slab	1	x	1	21.30	9.09	0.10	19.36
	D/f column	1	x	7	0.23	0.30	0.10	-0.05
	D/f column	2	x	7	0.30	0.40	0.10	0.17
	Ramp	1	x	1	10.80	1.80	0.10	1.94
	Platform	1	x	1	3.80	1.80	0.10	0.68
								0.27
							22.11	71.00 m ³
6	Supplying and fabricating steel rods							
	Footing				31.15	x	50.00	1557.71
	Grade Beam				10.48	x	125.00	1309.65
	Column				6.99	x	225.00	1573.29
	Structural Slab				22.11	x	60.00	1326.56
					70.73			12.78
								5780.00
	Total							57.80 Qtl.
7	Supplying and Filling with stone dust							
	Class Rooms 1,2,3	1	x	6	3.27	6.40	0.15	18.84
	Corridor	1	x	1	20.84	2.00	0.15	6.25
	d/f cross wall	1	x	5	2.00	0.23	0.15	-0.35
	Platform	1	x	1	3.20	1.57	0.15	0.75
								0.50
	Total							26.00 m ³
8	Supplying and Filling with Excavated earth							
	Class Rooms 1,2,3	1	x	6	3.27	6.40	0.20	25.11
	Corridor	1	x	1	20.84	2.00	0.20	8.34
	d/f cross wall	1	x	5	2.00	0.23	0.20	-0.46
	Platform	1	x	1	3.20	1.57	0.20	1.00
								0.01
	Total							34.00 m ³
9	Supplying and Filling with conveyed earth							
	Class Rooms 1,2,3	1	x	6	3.27	6.40	0.45	56.51
	Corridor	1	x	1	20.84	2.00	0.45	18.76
	d/f cross wall	1	x	5	2.00	0.23	0.45	-1.04
	Ramp	1	x	1	10.35	1.57	0.90/2	7.31
	Platform	1	x	1	3.20	1.57	0.45	2.26

0.20
84.00 m³

Sl No	Description	Nos			L	B	D	Qty	
10	CC 1:5:10 10mm Jelly for flooring								
	Other inner Class Rooms	1	x	6	3.27	6.40	0.10	12.56	
	Corridor	1	x	1	20.84	2.00	0.10	4.17	
	d/f cross wall	1	x	5	2.00	0.23	0.10	-0.23	
	Ramp	1	x	1	10.35	1.57	0.10	1.62	
	Platform	1	x	1	3.20	1.57	0.10	0.50	
								0.38	
	Total							19.00	m ³
11	Brick work in CM 1:6 using Country bricks of size 8-3/4" x 4-1/4" x 2-3/4"								
a	Foundation & Basement								
	X direction								
	3.50M Span	3	x	6	3.20	0.23	1.10	14.57	
	Y direction								
	Span 2.32m	1	x	7	2.00	0.23	1.10	3.54	
	Span 6.63m	1	x	7	6.23	0.23	1.10	11.03	
	stub column	1	x	7	0.23	0.23	1.10	-0.41	
								0.26	
	Total							29.00	m ³
12	Brick Work 1:5 using country bricks of size 8-3/4" x 4-1/4" x 2-3/4"								
	a) Foundation & Basement								
	Front step I	1	x	1	3.80	1.20	0.35	1.60	
	Step II	1	x	1	3.80	0.90	0.15	0.51	
	Step III	1	x	1	3.80	0.60	0.15	0.34	
	Step IV	1	x	1	3.80	0.30	0.15	0.17	
	Platform	1	x	1	3.80	0.23	1.80	1.57	
	Platform	1	x	2	1.57	0.23	0.90	0.65	
	Ramp	1	x	1	10.80	0.23	(0.90+0.10)/2	1.24	
	Ramp front side	1	x	1	1.57	0.23	0.10	0.04	
								0.18	
	Total							6.30	m ³
13	Plastering with CM 1:5 - 12mm thick								
	Brick work F & B				35.30	/0.23x2		306.99	
								1.68	
	Total							308.67	m ²

Sl No	Description	Nos			L	B	D	Qty	
14	Anti-termite treatment plinth Area	1	x	1	197.24			197.24	
								0.76	
	Total							198.00	m ²

Sl No	Description	Nos			L	B	D	Qty	
	Total							19.00	m ³
12	Brick work in CM 1:6 using Country bricks of size 8-3/4" x 4-1/4" x 2-3/4"								
a	Foundation & Basement								
	X direction								
	3.50M Span	3	x	6	3.20	0.23	1.10	14.57	
	Y direction								
	Span 2.32m	1	x	7	2.00	0.23	1.10	3.54	
	Span 6.63m	1	x	7	6.23	0.23	1.10	11.03	
	stub column	1	x	7	0.23	0.23	1.10	-0.41	
								0.26	
	Total							29.00	m ³
13	Brick Work 1:5 using country bricks of size 8-3/4" x 4-1/4" x 2-3/4"								
	a) Foundation & Basement								
	Front step I	1	x	1	3.80	1.20	0.35	1.60	
	Step II	1	x	1	3.80	0.90	0.15	0.51	
	Step III	1	x	1	3.80	0.60	0.15	0.34	
	Step IV	1	x	1	3.80	0.30	0.15	0.17	
	Platform	1	x	1	3.80	0.23	1.80	1.57	
	Platform	1	x	2	1.57	0.23	0.90	0.65	
	Ramp	1	x	1	10.80	0.23	(0.90+0.10)/2	1.24	
	Ramp front side	1	x	1	1.57	0.23	0.10	0.04	
								0.18	
	Total							6.30	m ³
14	Plastering with CM 1:5 - 12mm thick								
	Brick work F & B				35.30	/0.23x2		306.99	
								1.68	
	Total							308.67	m ²
15	Anti-termite treatment								
	plinth Area	1	x	1	197.24		---	197.24	
								0.76	
	Total							198.00	m ²


 Assistant Engineer, P.W.D.,
 Buildings (C&M) Section,
 Singampunari.


 Assistant Executive Engineer, P.W.D.,
 Buildings (C&M) Sub Division,
 Karaikudi.


 Executive Engineer, P.W.D.,
 Buildings (C&M) Division,
 Sivagangai.

Pm
 14/7/25
 14/01/26

Sl No	Description	Nos			L	B	D	Qty
	Ground floor							
	Verandah-Grill	5	x	1	2.90	1.00	1.60	23.20
	Verandah sides	2	x	1	1.80	1.00	1.60	5.76
	Ramp	1	x	1	10.80	1.00	0.90	9.72
								0.00
								127.00 m ²
29	Providing Black board in Two layers							
	G.F & F.F	1	x	3	3.80	-----	1.30	14.82
								0.18
								15.00 m ²
30	Providing Ceramic Black board in Two layers							
	G.F & F.F	1	x	3	3.80	-----	1.30	14.82
								0.18
								15.00 m ²
31	Supplying and Fixing MS Ladder width 45cm using 50x50x6mm MS Angle.							
	Ground floor	1	x	1	4.50			4.50
								0.50
								5.00 m2
32	Cupboard shutter							
	Ground floor	1	x	3	1.20		2.10	7.56
								0.04
								7.60 m2
33	Supplying and Fixing of Aluminium Dye Cast Letters of approved size and							
	9" அரக மேல்நிலைப்பள்ளி,	1	x	13				13.00 Nos
	6"	1	x	44.00				44.00 Nos
34	Supplying and Fixing of Tamil Stainless Steel Letters Emblem (15")							
	Emblem	1	x	1				1.00 Nos
35	Supply and fixing of stored pressure ABC (Mono Ammonium Phospate) Powder							
	Ground floor	1	x	3				3.00 Nos

872
14/7/25
Assistant Engineer, P.W.D.,
Buildings (C&M) Section,
Singampunari.

Assistant Executive Engineer, P.W.D.,
Buildings (C&M) Sub Division,
Karaikudi.

Executive Engineer, P.W.D.,
Buildings (C&M) Division,
Sivagangai.

Pm
14/7/25
14/7/25

Name of Work :-
Construction of 3 Class Room Building in Government Higher Secondary School at Mithravayal in
Sivagangai District.

Detailed Estimate - Super Structure

[illegible]

Sl No	Description	Nos			L	B	D	Qty	
2	Supplying and erecting centering for plane surfaces such as RCC Floor/Roof Beam, Lintels, Cantilever Beams, Bed Blocks etc.. with necessary supports and strutting upto 3.60m height in all floors with all cross bracings using MS Sheets made of 10 gauge thick welded with MS angle of Size 25mm x 25mm x 3mm for boarding laid over Steel adjustable Span of Size 2m x								
	Ground floor								
	Lintel								
	W bottom	1	x	6	2.26	0.23	---	3.12	
	Sides	6	x	2	3.20	---	0.15	5.76	
	Door D, D1/W1 bottom	1	x	6	1.66	0.23	---	2.29	
	Sides	6	x	2	3.20	---	0.15	5.76	
	Verandah End beam lintel near stair	2	x	2	2.00	---	0.30	2.40	
	bottom	1	x	2	2.00	0.23	---	0.92	
	Verandah beam lintel A row	6	x	2	3.20	---	0.30	11.52	
	bottom	6	x	1	3.20	0.23	---	4.42	
	Sunshade	1	x	6	2.26	0.60	---	8.14	
	sides	6	x	2	0.60	---	0.070	0.50	
	face	1	x	6	2.26	---	0.05	0.68	
	Sunshade verandah	1	x	5	2.26	0.60	---	6.78	
	sides	5	x	2	0.60	---	0.070	0.42	
	face	1	x	5	2.26	---	0.05	0.57	
	Sunshade verandah	1	x	2	1.80	0.60	---	2.16	
	sides	2	x	2	0.60	---	0.070	0.17	
	face	1	x	2	2.26	---	0.05	0.23	
	Roof beam								
	X direction								
	B & C row	6	2	2	3.20	---	0.23	17.66	
	B & C row bottom	2	x	6	3.20	0.23	---	8.83	
	Y direction								
	Span 6.63m	7	x	2	6.23	---	0.38	33.14	
	bottom	1	x	7	6.23	0.30	---	13.08	
	Portico beam	2	x	2	1.80	---	0.18	1.30	
	Bottom	1	x	2	1.80	0.23	---	0.83	
	Portico beam	1	x	2	3.30	---	0.18	1.19	
	Bottom	1	x	1	3.30	0.23	---	0.76	
								0.38	
								133.00	m ²

Description		Nos			L	B	D	Qty
Supplying and erecting centering for plane surfaces such as RCC Floor Slab, Roof Slab, Loft, Landing Slabs, etc with necessary supports and strutting upto 3.60m height in all floors with all cross bracings using MS Sheets made of 10 gauge thick welded with MS angle of Size 25mm x 25mm x 3mm for boarding laid over steel adjustable span of size 2m x 2m (expandable)								
<u>Ground floor</u>								
<u>Slab</u>								
class room bay	1	x	6	3.20	6.40	----	122.88	
Verandha bottom	1	x	1	20.84	2.00	----	41.68	
roof sides around	1	x	1	60.78	----	0.12	7.29	
Portico Slab bottom	1	x	1	3.80	1.57	----	5.97	
Around the sides	1	x	1	7.40	----	0.12	0.89	
							0.29	
							179.00 m ²	
Supplying and erecting steel centering including necessary supports For plane surfaces such as rectangular or square RCC columns etc. which require only nominal strutting using mild steel sheets made of 10 gauge thick welded with MS angle size 40mm x 40mm x 5 mm and supported by Steel Adjustable Telescopic Props of Size 2m x 2m (expandable upto 3.60m) made with outer steel pipe with dia 50mm (3.60mm thick) and inner steel pipe with dia 40mm (2.90mm thick).etc..complete in all floors complying with standard specification. Steel Adjustable telescopic props shall be provided as directed by the departmental Officers								
<u>Ground floor</u>								
<u>Columns</u>								
A row column	1	x	7	1.06	----	3.47	25.75	
B & C row column	2	x	7	1.40	----	3.47	68.01	
C row column	1	x	7	0.64	----	0.13	0.58	
For Dummy columns	1	x	7	1.06	----	1.00	7.42	
For Dummy columns	2	x	7	1.40	----	1.00	19.60	
							0.64	
							122.00 m ²	
Supplying and erecting steel centering including necessary supports for plane surfaces for Reinforced Cement Concrete works such as column footings, column pedestals, plinth beams, grade beams, staircase steps, Sill slabs etc. which require only nominal strutting using mild steel sheets of size 90cm x 60cm and 10 BG stiffened with welded mild steel angles of size 25mm x 25mm x 3 mm for boarding, laid with silver oak joists of size 10cm x 5cm & 7.5cm x 5cm as support runner, vertical stiffener, side support and Top Horizontal stiffener spaced at about 60cm to 90cm center to center as suitable intervals complete in all								
<u>Ground floor</u>								
<u>Sill Slabs & Sunshades</u>								
C row	2	x	6	3.20	----	0.08	3.07	
A row	2	x	5	3.20	----	0.08	2.56	
A to B row	2	x	2	2.00	----	0.08	0.64	
							0.73	

7.00 m²

[illegible]

Sl No	Description	Nos			L	B	D	Qty	
6	Supplying and fabricating steel rods								
a	Ground floor								
	Slab				23.99	x	100.00	2398.97	
	Beam				7.28	x	225.00	1638.99	
	Column				9.69	x	225.00	2180.30	
	sill slab				0.72	x	60.00	43.28	
	Lintel & sunshade				4.28	x	100.00	428.43	
								20.03	
					45.97			6710.00	
								67.10	Qti
7	kota stone								
	Ground Floor: Class room	1	x	2	6.77	6.40	---	86.66	
	Class room	1	x	1	6.84	6.40	---	43.78	
	class room door way	1	x	6	1.20	0.23	---	1.66	
	Corridor portion	1	x	1	20.84	2.03	---	41.68	
	Corridor entrance way	1	x	1	3.20	0.23	---	0.74	
	All class room Skirting	1	x	2	26.34	0.10	---	5.27	
	All class room Skirting	1	x	1	26.48	0.10	---	2.65	
	Corridor Skirting	1	x	1	45.68	0.10	---	4.57	
	D/f door	2	x	6	1.20	0.10	---	-1.44	
	D/f E.G	1	x	1	3.20	0.10	---	-0.32	
								0.77	
								186.00	m ²
8	Brick partition walls using best quality of Country bricks 8-3/4" x 4-1/4" x 2-3/4" in Cement Mortar 1:3 (One Cement and Three crushed stone Sand (M Sand))								
a)	Ground floor								
	cupboard base	3	x	1	0.45	1.20	---	1.62	
	cupboard wall	3	x	2	0.45	---	2.10	5.67	
								0.03	
								5.70	m ²
9	Paving the floor with prepolished concrete tiles with C.M 1:3 20mm thick.								
	Ramp	1	x	1	0.80	1.80	---	19.44	
	Platform	1	x	1	3.80	1.80	---	6.84	
								0.72	
								27.00	m ²
10	Paving the floor prepolished concrete steps tiles with C.M 1:3								
	Step Tread	1	x	4	3.80	0.30	---	4.56	
	Step rise	1	x	5	3.80	---	0.15	2.85	
								0.59	
								8.00	m ²

Description	Nos			L	B	D	Qty	
Weathering course in brick jelly lime concrete using broken brick jelly of size 20mm uniform gauge in pure slaked lime (no crushed stone sand to be used) to								
Over roof	1	x	1	20.84	8.64	0.08	14.40	
portico	1	x	1	3.20	1.57	0.08	0.40	
Splashing	1	x	0.5	58.96	0.15	0.15	0.66	
Splashing portico	1	x	0.5	9.54	0.15	0.15	0.11	
							0.42	
							16.00	m ³
Finishing the top of roof with one course of machine pressed tiles of following size of approved quality set in Cement Mortar 1:3 (One Cement and Three Crushed stone Sand) 12mm thick mixed with water proofing compound								
Over roof	1	x	1	20.84	8.64	---	180.06	
portico	1	x	1	3.20	1.57	---	5.02	
Splashing	1	x	1	58.96	---	0.23	13.56	
Splashing portico	1	x	1	9.54	---	0.23	2.19	
							0.16	
TOTAL							201.00	
Supplying and fixing of 110mm dia PVC rain water down fall pipe								
Class room roof from First floor	1	x	5	4.00	---		20.00	
							20.00	Rm
Special ceiling plastering with CM 1:3 - 10mm thick								
Centering for beam qty				---	---	---	133.00	
Centering for column qty				---	---	---	122.00	
Centering for Slab & stair qty				---	---	---	179.00	
							434.00	
					434.00	0.85	368.90	
							2.10	
							371.00	m ²
Plastering with CM 1:5 - 12mm thick								
BW in cm 1:6 - G.F	=	58.00		x 2 / 0.23	=		504.35	
B.P in cm 1:3 - G.F	=	5.67		x 2	=		11.34	
							2.69	
							518.38	m ²

Sl No	Description	Nos			L	B	D	Qty	
29	Providing Black board in Two layers								
	G.F & F.F	1	x	3	3.80	----	1.30	14.82	
								0.18	
								15.00	m ²
30	Providing Ceramic Black board in Two layers								
	G.F & F.F	1	x	3	3.80	----	1.30	14.82	
								0.18	
								15.00	m ²
31	Supplying and Fixing MS Ladder width 45cm using 50x50x6mm MS Angle.								
	Ground floor	1	x	1	4.50			4.50	
								0.50	
								5.00	m2
32	Cupboard shutter								
	Ground floor	1	x	3	1.20		2.10	7.56	
								0.04	
								7.60	m2
33	Supplying and Fixing of Aluminium Dye Cast Letters of approved size and colour. The colour treatment process is achieved with MRF colour coat and								
	9"அரசு மேல்நிலைப்பள்ளி,	1	x	13				13.00	Nos
	6"	1	x	44.00				44.00	Nos
34	Supplying and Fixing of Tamil Stainless Steel Letters Emblem (15")								
	Emblem	1	x	1				1.00	
								1.00	Nos
35	Supply and fixing of stored pressure ABC (Mono Ammonium Phosphate) Powder Type Fire Extinguisher of 6 kg. capacity as per IS:15683 with pressure gauge,								
	Ground floor	1	x	3				3.00	
								3.00	Nos

Name of work:

Construction of 3 Class rooms building in Govt. Hr. Sec. School at A.Mithravayal in Sivagangai district.

Pavement around the building

DETAILED ESTIMATE

Sl. No.	Description	Nos.	MEASUREMENT			Contents
			L	B	D	
1	Earthwork open excavation in all soils and silt clay sub soils					
	Pavement retaining wall	1 x 1	41.62	0.45	0.45	8.43
						0.57
						9.00 M ³
2	Cement Concrete 1:5:10 (One Cement, Five c.s sand and Ten hard broken stone jelly)					
	Pavement	1 x 1	41.62	0.45	0.08	1.50
	Add etc.,					0.10
						1.60 M ³
3	Supplying and filling gravel in 'foundation and basement					
	Pavement	1 x 1	41.62	0.67	0.15	4.18
	Add etc.,					0.02
						4.20 M ³
4	Cement Concrete 1:5:10 (One Cement, Five c.s sand and Ten hard broken stone jelly)					
	Pavement	1 x 1	41.62	0.45	0.15	2.81
	Add etc.,					0.19
						3.00 M ³
5	Brick work in Cement Mortar 1:5, using Burnt Clay Brick of size 8 3/4" x 4 1/4" x 2 3/4"					
a	Foundation and basement					
	Pavement	1 x 1	41.62	0.23	0.60	5.74
	Add etc.,					0.06
						5.80 M ³
6	Plastering with Cement Mortar 1:5 (One cement and Five M-sand), 12mm thick					
	Pavement	1 x 1	41.62	-	0.60	24.97
	Pavement top	1 x 1	41.62	0.23	-	9.57
	Add etc.,					0.46
						35.00 M ²
7	Precast pavement slab					
	Pavement	1 x 1	41.62	0.90	-	37.46
	Add etc.,					0.54
						38.00 M ²

Assistant Engineer, P.W.D.,
Buildings (C&M) Section,
Singampunari.

Assistant Executive Engineer, P.W.D.,
Buildings (C&M) Sub Division,
Karaikudi.

Executive Engineer, P.W.D.,
Buildings (C&M) Division,
Sivagangai.

14/7/25
14/7/25

Name of Work :-
Construction of 3 Class Room Building in Government Higher Secondary School at
Mithravayal in Sivagangai District.


COMBINED QUANTITY

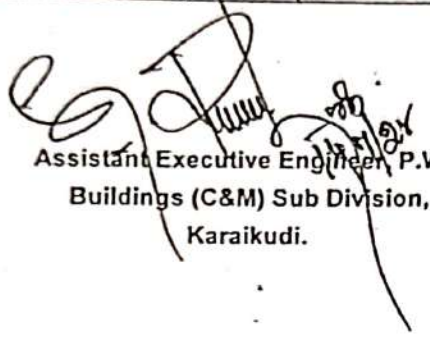
Sl No	Description of work	Unit	Sub Structure	Super structure	Pavement	Total Qty
1	Earth work excavation in all soils	M ³	310.00		9.00	319.00
2	Supplying and filling of stone dust	M ³	26.00		1.60	27.60
3	supplying and filling in foundation, basement, etc with conveyed earth in layers of not more than 150 mm thick	M ³	84.00		4.20	88.20
4	Supplying and filling Earth	M ³	34.00			34.00
5	CC 1:5:10 using 40mm gauge for Foundation	M ³	15.00		3.00	18.00
6	CC 1:5:10 using 40mm gauge for Flooring	m ³	19.00			19.00
7	Brick works in CM 1:5					0.00
a	For foundation and basement	M ³	6.30		5.80	12.10
8	Brick works in CM 1:6					0.00
a	For foundation and basement	M ³	29.00			29.00
b	For S.S in ground floor	M ³		58.00		58.00
9	Brick partition wall in CM 1:3					0.00
a	For S.S in ground floor	M ²		5.70		5.70
10	Supplying and erecting steel centering including necessary supports for plane surfaces for Reinforced Cement Concrete works such as column footings, column pedestals, plinth beams, grade beams, staircase steps, Slab slabs etc. which require only nominal strutting using mild	M ²	142.00	7.00		149.00
11	Supplying and erecting steel centering including necessary supports For plane surfaces such as rectangular or square RCC columns etc. which require only nominal strutting using mild	M ²	85.00	122.00		207.00

SI No	Description of work	Unit	Sub Structure	Super structure	Pavement	Total Qty
12	Supplying and erecting centering for plane surfaces such as RCC Floor/Roof Beam, Lintels, Cantilever Beams, Bed Blocks etc with necessary	M ²		133.00		133.00
13	Supplying and erecting centering for plane surfaces such as RCC Floor Slab, Roof Slab, Loft, Landing Slabs, etc with necessary supports and	M ²	6.10	179.00		185.10
14	M-20 using 20mm jelly					0.00
a	For foundation and basement	M ³	71.00			71.00
b	For S.S in ground floor	M ³		47.00		47.00
c	For S.S in First floor	M ³		47.00		
15	Supplying and fabricating of steel					0.00
a	For foundation and basement	Qtl.	57.80			57.80
b	For S.S in ground floor	Qtl.		67.10		67.10
16	weathering course in brick jelly lime concrete using broken brick jelly of size 20mm uniform	M ³		16.00		16.00
17	Finishing the top of roof with one course of machine pressed tiles of following size of	M ²		201.00		201.00
18	Paving with flooring Vitrified Tiles	M ²		186.00		186.00
19	Paving the floor with prepolished concrete tiles with C.M 1:3 20mm thick	M ²		27.00		27.00
20	Paving the floor prepolished concrete steps tiles with C.M 1:3	M ²		8.00		8.00
21	Supplying and fixing of Steel balustrades	M ²		4.40		4.40
22	Supplying and fixing GI handrail for differently abled person	Rm		11.00		11.00
23	Supplying and fixing of rain water down fall pipe					0.00
a	110mm dia	Rm		20.00		20.00
24	Cuddapa slab 38 / 40mm thick	M ²		6.50		6.50
25	Plastering in CM 1 : 5 - 12mm thick	M ²	308.67	518.38	35.00	862.05


Sl No	Description of work	Unit	Sub Structure	Super structure	Pavement	Total Qty
26	Special Ceiling plastering 1 : 3 - 10mm Tk	M ²		371.00		371.00
27	Painting two coats of Interior emulsion paint	m ²		535.00		535.00
28	Painting the wall two coats in Exterior Emulsion paint	M ²		356.00		356.00
29	Painting new iron work	M ²		127.00		127.00
30	Providing Black board in Two layers	m ²		15.00		15.00
31	Supplying and fixing of Steel door					0.00
	Double leaves	M ²		8.65		8.65
32	Supplying and fixing of Steel Emergency exit doors cum window	M ²		8.65		8.65
33	Supplying and fixing of Steel Window					0.00
a	Three leaves	M ²		17.30		17.30
34	Supplying and fixing of Entrance steel door					0.00
a	Double leaves	M ²		7.70		7.70
35	Supplying and fixing of M.S grill	Kg		724.00		724.00
36	Providing Preconstruction Anti termite treatment	M ²	198.00			198.00
37	Providing Ceramic Black board in Two layers	M ²		15.00		15.00
38	ladder	R M ²		5.00		5.00
39	Cupboard shutter	M ²		7.60		7.60
40	Manufacturing, supplying and fixing in position plain cement concrete precast pavement slab	M ²			38.00	38.00
41	Supplying and Fixing of Aluminium Dye Cast Letters of approved size and colour	Nos		0.00		0.00
42	Supplying and Fixing of Tamil Stainless Steel Letters Emblem (15")	Nos		1.00		1.00
43	Supply and fixing of stored pressure ABC (Mono Ammonium Phosphate) Powder	Nos		3.00		3.00

Sl-No	Description of work	Unit	Sub Structure	Super structure	Pavement	Total Qty
42	Supplying and Fixing of Tamil Stainless Steel Letters Emblem	Nos		1.00		1.00
43	Supply and fixing of stored pressure ABC (Mono	(Nos		3.00		3.00


 Assistant Engineer, P.W.D.,
 Buildings (C&M) Section,
 Singampunari.


 Assistant Executive Engineer, P.W.D.,
 Buildings (C&M) Sub Division,
 Karaikudi.


 Executive Engineer, P.W.D.,
 Buildings (C&M) Division,
 Sivagangai.


 14/7/25

Name of work:
Construction of 3 Class rooms building in Govt. Hr. Sec. School at A.Mithravayal in Sivagangai district.

LEAD STATEMENT - A.MITHRAVAYAL

Sl. No.	Material	Source of Supply	Distance (Kms)	Unit	Cost	Lead Charges	Total
1	Cement	Local	5	MT	5960.00	36.80	5996.80
2	Steel	Local	5	MT	56000.00	36.80	56036.80
3	Crushed stone (M.Sand)	Thiruchunai	35	cu.m.	1338.00	348.75	1686.75
4	Crushed stone(P-Sand)	Thiruchunai	35	cu.m.	1343.00	348.75	1691.75
5	Burnt clay Bricks 8 ³ / ₄ " x 4 ¹ / ₄ " x 2 ³ / ₄ " with designation 7.5	Thalakkavur	27	1000 Nos.	6220.00	235.60	6455.60
8	HGB 40mm ISS metal	Lembalakudi	43	cu.m.	1155.00	416.49	1571.49
9	HGB 25mm ISS metal	Lembalakudi	43	cu.m.	992.00	416.49	1408.49
10	HGB 20mm ISS metal	Lembalakudi	43	cu.m.	1608.00	416.49	2024.49
11	HGB 12mm ISS metal	Lembalakudi	43	cu.m.	1492.00	416.49	1908.49
12	HGB 10mm ISS metal	Lembalakudi	43	cu.m.	1097.00	416.49	1513.49
12	HGB 10-12mm ISS metal	Lembalakudi	43	cu.m.	1294.50	416.49	1710.99
13	HGB 6-10mm ISS metal	Lembalakudi	43	cu.m.	919.45	416.49	1335.94
	HGB 6-12mm ISS metal	Lembalakudi	43	cu.m.	1116.95	416.49	1533.44
13	HGB 6mm ISS metal	Lembalakudi	43	cu.m.	741.90	416.49	1158.39
14	Brick jelly 40mm	Thalakkavur	27	cu.m.	705.00	191.79	896.79
15	Brick jelly 20mm	Thalakkavur	27	cu.m.	786.00	191.79	977.79
16	Gravel	Local	5	cu.m.	222.70	58.95	281.65
17	Slacked lime	Karaikudi	18	cu.m.	993.00	136.16	1129.16
18	Shell lime	Karaikudi	18	cu.m.	1348.00	0.00	1348.00
19	Pressed tiles 23 x 23 x 2cm	Karaikudi	18	1000	16106.00	111.70	16217.70
21	Rough Stone	Lembalakudi	43	cu.m.	449.40	416.49	865.89
22	Bond Stone	Lembalakudi	43	cu.m.	648.40	416.49	1064.89
23	Quarry Rubish	Lembalakudi	43	cu.m.	96.65	741.69	838.34
24	stone dust	Lembalakudi	43	cu.m.	145.95	284.85	430.80

Certificate:

Certified that the lead particulars furnished above are correct to the best of my knowledge and belief.

5.8.12 14/7/25
Assistant Engineer, P.W.D.,
Buildings (C&M) Section,
Singampunari.

Assistant Executive Engineer, P.W.D.,
Buildings (C&M) Sub Division,
Karaikudi.

Executive Engineer, P.W.D.,
Buildings (C&M) Division,
Sivagangai.

Name of work:

Construction of 3 Class rooms building in Govt. Hr. Sec. School at A.Mithravayal in Sivagangai district.

MORTAR - PWD (Manual Mix) - Crushed Stone Sand

Sl. No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
SUB-DATA						
29			Cement Mortar 1:3			
	480.00	kg	Cement			
	1.00	cu.m.	Crushed stone Sand	5996.80	MT	2878.46
	1.92	lit	Mortar Plasticizer (Liquid)@ 200ml per bag	1686.75	cu.m.	1686.75
	1.00	cu.m.	Mixing Charges (Manual Mixing)	75.00	Lit	144.00
			Rate for 1 cu.m.	127.60	cu.m.	127.60
						4836.81
31			Cement Mortar 1:5			
	288.00	KG	Cement			
	1.00	cu.m.	Crushed stone Sand	5996.80	MT	1727.08
	1.15	lit	Mortar Plasticizer (Liquid)@ 200ml per bag	1686.75	cu.m.	1686.75
	1.00	cu.m.	Mixing Charges (Manual Mixing)	75.00	Lit	86.40
			Rate for 1 cu.m.	127.60	cu.m.	127.60
						3627.83
32			Cement Mortar 1:6			
	240.00	kg	Cement			
	1.00	cu.m.	Crushed stone Sand	5996.80	MT	1439.23
	0.96	lit	Mortar Plasticizer (Liquid)@ 200ml per bag	1686.75	cu.m.	1686.75
	1.00	cu.m.	Mixing Charges (Manual Mixing)	75.00	Lit	72.00
			Rate for 1 cu.m.	127.60	cu.m.	127.60
						3325.58
34			Cement Mortar 1:3 (with P Sand)			
	480.00	KG	Cement			
	1.00	cu.m.	Plastering Sand	5996.80	MT	2878.46
	1.92	lit	Mortar Plasticizer (Liquid)@ 200ml per bag	1691.75	cu.m.	1691.75
	1.00	cu.m.	Mixing Charges (Manual Mixing)	75.00	Lit	144.00
			Rate for 1 cu.m.	127.60	cu.m.	127.60
						4841.81
36			Cement Mortar 1:5 (with P Sand)			
	288.00	kg	Cement			
	1.00	cu.m.	Plastering Sand	5996.80	MT	1727.08
	1.15	lit	Mortar Plasticizer (Liquid)@ 200ml per bag	1691.75	cu.m.	1691.75
	1.00	cu.m.	Mixing Charges (Manual Mixing)	75.00	Lit	86.40
			Rate for 1 cu.m.	127.60	cu.m.	127.60
						3632.83
42			Labour wrought and put up for 1 cu.m.			
	4.50	Nos.	Carpenter I Class	1073.00	Each	4828.50
	13.20	Nos.	Carpenter II Class	1025.00	Each	13530.00
	8.80	Nos.	Mazdoor I Class	716.00	Each	6300.80
			Sundries for nails, screws, etc.			246.59
			Total			24905.89
			Rate for 1 cu.m.			24905.89
43			Priming coat for new iron work - 10 sq.m.			
	1.33	lit.	Red oxide primer	136.90	lit.	182.08
	0.70	Nos.	Painter I Class	876.00	Nos.	613.20
			Sundries for brushes etc.,		LS	9.10
			Rate for 10 sq.m.			804.38
			Rate for 1 sq.m.			80.44

Sl. No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
121			Earth work excavation for foundation by Mechanical means for Isolated & Combined Footing etc in all soils and sub-soils and to full depth as may be directed except in rock requiring blasting inclusive of shoring shuttering, bailing out water wherever necessary and depositing the surplus earth within the compound in places shown by the departmental officers with an initial lead of 100 mts and clearing and levelling including dressing of sides and raming of bottoms etc., complete complying with standard specification and as directed by the departmental officers.- Upto 2.40m Footing Depth. Data worked out for 48 m ³ per day/8 hrs.			
			For 48 m ³			
	8.00	Hour	Earth Excavator - Wheeled Backhoe loader (0.50 m ³ Capacity)	784.00	Hour	6272.00
	8.00	Hour	Tractor with Tractor Incl. Driver and Fuel (For Conveyance of earth upto 100mts)	600.00	Hour	4800
	6.00	no	Mazdoor Category I	716.00	no	4296
	38.5	cu.m	Refilling charges (48x0.802)	42.85	cu.m	1649.73
			Total for 48 m ³			17017.73
			Sub Total for 1 cu.m			354.54 X
			Add water charges @1% of Sub Total X			3.55
			Rate for 1 Cu.m.			358.08
126			Supplying and filling in foundation, basement, etc with filling crushed stone dust in layers of not more than 15 cm thick well watered, rammed and consolidated etc. complete complying with standard specification and as directed by the departmental officers.			
	1.00	cu.m.	Cost of crushed stone sand for filling	430.80	cu.m.	430.80
	1.00	cu.m.	Refilling charges	42.85	cu.m.	42.85
			Sub Total			473.65 X
			Add water charges @1% of Sub Total X			4.74
			Rate for 1 Cu.m.			478.39
130			Supplying and filling in foundation, basement, etc with conveyed earth in layers of not more than 150mm thick layers well watered, rammed with surface vibrator and consolidated including conveyance charges etc. complete complying with standard specification and as directed by the departmental officers.			
			<u>SUB DATA</u>			
			Surface Vibrator or Earth Rammer Charges - (out turn - 16 m ³ / day/ 8hrs)			
			For 1 m ³			
	1/16	Day	Hire Charges for Surface Vibrator or Earth Rammer Charges Incl. Fuel Charges	1000.00	Day	62.5
	1/16	Nos	Labour Charges for Surface Vibrator Operator- Mazdoor Category I	716.00	Nos	44.75
			Sub Total for 1 cu.m			107.25 A
			<u>Main Data</u>			
	1.10	cum	Cost of Conveyed earth	123.26	cum	135.586
	1.00	cum	Filling charge	42.85	cum	42.85
	1.10	cum	Conveyance Charges (Lead) (5*11.79)	58.95	cum	64.845

Sl. No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
	1.00	cum	Surface Vibrator or Earth Rammer Charges as per Sub-data Total A	107.25	cum	107.25
			Sub Total for 1 cu.m			350.531 X
			Add water charges @1% of Sub Total X			3.51
			Rate for 1 Cu.m.			354.04
127			Refilling with excavated earth other than sand with an initial head load of 100 mts. and depositing the earth as shown by the departmental officers in layers of not more than 15cm thick well rammed with surface vibrator, watered and consolidated etc., complete complying with standard specification and as directed by the departmental officers.			
			SUB DATA			
			Surface Vibrator or Earth Rammer Charges - (out turn - 16 m3/ day/ 8hrs)			
			For 1 m3			
	1/16	Day	Hire Charges for Surface Vibrator or Earth Rammer Charges Incl. Fuel Charges	1000.00	Day	62.5
	1/16	Nos	Labour Charges for Surface Vibrator Operator-Mazdoor Category I	716.00	Nos	44.75
			Sub Total for 1 cu.m			107.25 A
			Main Data			
	1.00	cu.m	Refilling with earth other than sand	42.85	cu.m.	42.85
	1.00	cu.m	Surface-Vibrator or Earth Rammer Charges as per Sub-data Total A	107.25	cu.m.	107.25
			Sub Total for 1 cu.m			150.10 X
			Add water charges @1% of Sub Total X			1.50
			Rate for 1 Cu.m.			151.60
141			Cement Concrete 1:5:10 (One Cement, Five crushed stone sand and Ten hard broken stone jelly) using 40 mm gauge hard broken granite stone jelly for foundation including dewatering wherever necessary and laid in layers of not more than 15 cm thick well rammed, consolidated and including curing etc. complete complying with standard specification and as directed by the departmental officers -Mixing by mechanical means			
			SUB DATA			
			For machine mix - 27 m ³ per day mixing - 9 bags/hour(1 bag/7 minutes)			
	1.00	Day	Mixer machine with hopper	1500.00	Day	1500.00
	1.00	Day	Mixer machine driver	741.00	Day	741.00
			Total for 27 cu.m.			2241.00
			Total for 1 cu.m.		Say	83.000
						83.000 A
			MAIN DATA			
	9.00	cu.m.	Broken stone Jelly - 40mm size	1571.49	cu.m.	14143.41
	1296.00	Kg	Cement	5996.80	M.T	7771.85
	4.50	Cum	Crushed Stone Sand	1686.75	Cum	7590.38
			Mixing charges by Mechanical Means (as per Sub Data- Total-A)	83.00	cu.m.	830.00
	10.00	cu.m.		1025.00	Each	1845.00
	1.80	Nos.	Mason II Class	716.00	Each	12673.20
	17.70	Nos.	Mazdoor Category I	587.00	Each	8276.70
	14.10	Nos.	Mazdoor Category II			53130.54
			Total for 10 cu.m.			5313.05 X
			Sub Total for 1 Cu.m.			53.13
			Add water charges @1% of Sub Total X			

Sl. No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
			Rate for 1 Cu.m. Brick work in following Cement Mortar using best quality Burnt Clay Brick of size 8 3/4" x 4 1/4" x 2 3/4" with class designation of 7.5 conforming to IS 1077-1992 for foundation and basement including Cost of Mortar Plasticizer curing, etc., complete complying with standard specification and as directed by the departmental officers. Brickwork shall be done as per IS 2212-1991 adopting English Bond generally, other type of bond shall be done as directed by the Executive Engineer In charge. (Country Bricks)			5366.18
a			In Cement Mortar 1:6			
	1300.00	Nos.	Cost of Burnt Clay Brick of size 8 3/4" x 4 1/4" x 2 3/4" with class designation of 7.5	6455.60	1000 Nos.	8392.28
	0.708	Cum	Cement mortar 1:6	3325.58	Cum	2354.51
	1.00	Nos.	Mason I Class	1098.00	Each	1098.00
	2.00	Nos.	Mason II Class	1025.00	Each	2050.00
	2.00	Nos.	Mazdoor Category - I	716.00	Each	1432.00
	2.00	Nos.	Mazdoor Category - II	587.00	Each	2348.00
	4.00	Nos.	Mazdoor Category - II			17674.79
			Total for 100 cft (or) 2.83168 cu.m.			6241.80 X
			Sub Total for 1 Cum.			62.42
			Add water charges @1% of Sub Total X			6304.22
			Rate for 1 Cu.m.	6304.22		6304.22
			For Foundation and Basement	6304.22	86.79	6391.01
			For Ground Floor	6391.01	175.12	6566.13
			For First Floor	6566.13	175.12	6741.25
			For Second Floor	6741.25	175.12	6916.37
			For Third Floor	6916.37	175.12	7091.49
			For Fourth Floor	7091.49	175.12	7266.61
			For Fifth Floor			
b			In Cement Mortar 1:5			
	1300.00	Nos.	Cost of Burnt Clay Brick of size 8 3/4" x 4 1/4" x 2 3/4" with class designation of 7.5	6455.60	1000 Nos.	8392.28
	0.708	Cum	Cement mortar 1:5	3627.83	Cum	2568.50
	1.00	Nos.	Mason I Class	1098.00	Each	1098.00
	2.00	Nos.	Mason II Class	1025.00	Each	2050.00
	2.00	Nos.	Mazdoor Category - I	716.00	Each	1432.00
	2.00	Nos.	Mazdoor Category - II	587.00	Each	2348.00
	4.00	Nos.	Mazdoor Category - II			17888.78
			Total for 100 cft (or) 2.83168cu.m.			6317.37 X
			Sub Total for 1 Cum.			63.17
			Add water charges @1% of Sub Total X			6380.55
			Rate for 1 Cu.m.	6380.55		6380.55
			For Foundation and Basement	6380.55	86.79	6467.34
			For Ground Floor	6467.34	175.12	6642.46
			For First Floor	6642.46	175.12	6817.58
			For Second Floor	6817.58	175.12	6992.70
			For Third Floor	6992.70	175.12	7167.82
			For Fourth Floor	7167.82	175.12	7342.94
			For Fifth Floor			

Sl. No.	Qty.	Unit	Description	rupees	Per	rupees
212			Brick partition walls of 10.80cm thickness using best quality Burnt Clay Brick of size 8-3 3/4" x 4-1 1/4" x 2-3/4" with class designation of 7.5 conforming to IS 1077-1992 in Cement Mortar 1:3 (One Cement and Three CS Sand) using hoop iron reinforcement if found necessary including Cost of Mortar Plasticizer, curing etc. complete complying with standard specification and as directed by the departmental officers. (Hoop iron reinforcement will be measured and paid for separately)			
			Brick Partition wall in F&B/ GF/ FF/SF and etc...			
			For Foundation and basement			
1.08	Cum		Cost of Brick work in Cement Mortar 1:3 using best quality Burnt Clay Brick of size 8-3/4" x 4-1/4" x 2-3/4" with class designation of 7.5 in F&B/GF/FF/SF and etc...without water charges	6685.85	Cum	7220.72
1.00	No.		Mason I Class	1098.00	Each	1098.00
			Total for 10 sq.m.			8318.72
			Sub Total for 1 sq.m.			831.87 X
			Add water charges @1% of Sub Total X			8.32
			Rate for 1 sq.m.			840.19
			For Ground Floor			
1.08	Cum		Cost of Brick work in Cement Mortar 1:3 using best quality Burnt Clay Brick of size 8-3/4" x 4-1/4" x 2-3/4" with class designation of 7.5 in F&B/GF/FF/SF and etc...without water charges	6772.64	Cum	7314.45
1.00	No.		Mason I Class	1098.00	Each	1098.00
			Total for 10 sq.m.			8412.45
			Sub Total for 1 sq.m.			841.25
			Add water charges @1% of Sub Total X			8.41
			Rate for 1 sq.m.			849.66
147			Supplying and erecting steel centering including necessary supports for plane surfaces for Reinforced Cement Concrete works such as column footings, column pedestals, plinth beams, grade beams, staircase steps, Sill slabs etc. which require only nominal strutting using mild steel sheets of size 90cm x 60cm and 10 BG stiffened with welded mild steel angles of size 25mm x 25mm x 3 mm for boarding, laid with silver oak joists of size 10cm x 5cm & 7.5cm x 5cm as support runner, vertical stiffener, side support and Top Horizontal stiffener spaced at about 60cm to 90cm centre to centre or at suitable intervals etc. complete in all floors complying with standard specification. (Payment for centering shall be given after the concrete is laid).			
			Shuttering area of Grade Beam Taken	30.60	m ²	
			Total Area of MS Sheet Required	32.13	m ²	
			Silver Oak Joists required (10.00 x 5.00cm)	1.64	m ³	
			Silver Oak Joists required (7.50 x 5.00cm).	0.17	m ³	
			Total	1.81	m ³	
			Add 5% for Wastage	0.09	m ³	
			Total	1.90	m ³	
			Sub Data: 1 - Cost of MS Sheet Per Sq.m Per I use			
			Cost of MS sheets and angles for each set			
			Weight of MS sheets 10 gauge of size 90cm x 60cm x 3.175mm	13.46	Kg	
			3.175 x 7850 / 1000 x 0.54 =			

Sl. No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
			Weight of MS angles of size 25cm x 25mm x 3mm: $3.6 \times 1.1 \text{ kg / m} =$	4.00	Kg	
13.46	Kg		Cost of MS sheets	53.00	Kg	713.38
4.00	Kg		Cost of MS angles	53.00	Kg	212.00
						925.38
LS			Add for cutting, bending, welding charges etc. @ 10% of material cost		LS	92.54
						1017.92
			Total cost for one set of 0.54m ² (0.9x0.6m) sheet for 40 uses		Rs.	1017.92
			Total Cost for one Sq.m per 40 uses		Rs.	1017.92
			Total Cost for one Sq.m per 1 use (A)		Rs.	25.45 A
			Sub Data: 2 - Cost of Silver Oak Joists			
1.90	m ³		Cost of Silver Oak Joists	15500.00	m ³	29450.00
			Total for 5 Uses			29450.00
			Total for 1 Use		Rs.	5890.00 B
			Main Data for 30.60 m²			
32.13	m ²		Cost of MS Sheets per use (As per A)	25.45	m ²	817.64
1.00	Use		Cost of Silver Oak Joists (As per B)	5890.00	Use	5890.00
1.00	Nos		Carpenter I Class	1073.00	Nos	1073.00
4.00	Nos		Carpenter II Class	1025.00	Nos	4100.00
9.00	Nos		Mazdoor, Category I	716.00	Nos	6444.00
1.50	Nos		Fitter II Class (Bar bending)	922.00	Nos	1383.00
			Add for Wedges, Coils, nails @ 1% of materials			67.08
			For Periodical Cleaning, Oiling and Maintenance of MS Sheets, Props, Spans and Joists @ 5% of Material			348.15
			Total cost for 30.60 m ²			20122.87
			Rate for 1 sq.m.			657.61
148			Supplying and erecting steel centering including necessary supports For plane surfaces such as rectangular or square RCC columns etc. which require only nominal strutting using mild steel sheets made of 10 gauge thick welded with MS angle size 40mm x 40mm x 5 mm and supported by Steel Adjustable Telescopic Props of Size 2m x 2m (expandable upto 3.60m) made with outer steel pipe with dia 50mm (3.60mm thick) and inner steel pipe with dia 40mm (2.90mm thick).etc..complete in all floors complying with standard specification. Steel Adjustable telescopic props shall be provided as directed by the departmental Officers. (Payment for centering shall be given after the concrete is laid).			
I			Total Column Centering Area 10 Nos of columns of Size 0.50 x 0.30m for 2.10 m Length = $10 \times 2 \times (0.30 + 0.50) \times 2.10$	33.60	m ²	
			Total No. of MS Sheets of size 2.10 x 0.50m & 2.10 x 0.30m Required for 1 column = 2 Sets 10 columns = 20 Sets.	20.00	Set	
			Add 5% for Overlap and wastage	1.00	Set	
			Total	21.00	Set	
II			Total Number of adjustable Telescopic Prop (Vertical) required for 1 column = 6 No. 10 columns = 60 No.	60.00	Nos	
			Total	60.00	Nos	
			Sub Data: 1 - Cost of MS Sheet Per Sq.m Per I use			
			Cost of MS sheets and angles for each set			
			Weight of MS sheets 10 gauge of size 2.10 x 0.50m & 2.10 x 0.30m			
			$2.1 \times 0.50 \times 3.175 \times 7850/1000 =$	26.17	Kg	

		Description	rupees	Per	rupees
		$2.1 \times 0.30 \times 3.175 \times 7850/1000 =$			
		Total Weight of MS Sheets	15.70	Kg	
		Weight of MS angles of size 40cm x 40mm x 5mm:	41.87	Kg	
		Length of MS angle for			
		a. Sheet size 2.10 x 0.50m incl. stiffeners = $(2 \times 2.10) + (8 \times 0.50) = 8.20$ Rm			
		b. Sheet size 2.10 x 0.30m incl. stiffeners = $(2 \times 2.10) + (8 \times 0.30) = 6.60$ Rm			
		Total Length of MS Angle = 14.80Rm			
		Total Weight of MS Angles = $14.80 \times 3 \text{ kg / m}$	44.40	Kg	
41.87	Kg	Cost of MS sheets	53.00	Kg	2219.11
44.40	Kg	Cost of MS angles	53.00	Kg	2353.20
		Total			4572.31
		Add for Bolts & Nuts etc., charges @ 1% of material cost			45.72
		Add for cutting, bending, welding, charges etc. @ 1% of material cost		LS	45.72
LS		Total cost for one set of (2.1x0.50m & 2.1x0.30m) sheet for 40 uses		Rs.	4663.76
		Sub Data: 2 (Cost of MS Sheet, Telescopic Prop)			
21.00	Set	Cost of MS sheets	4663.76	Set	97938.88
60.00	Nos	Cost of Telescopic Steel Props of size 2m X 2m	1760.00	Nos	105600.00
		Total for 40 Uses			203538.88
		Total for 1 Use			5088.47
		Main Data for 33.60 m²			
1.00	use	Cost of MS Sheets, Telescopic Props (as per A)	5088.47	use	5088.47
5.00	Nos	Carpenter II Class	1025.00	Nos	5125.00
8.00	Nos	Mazdoor Category I	716.00	Nos	5728.00
4.00	Nos	Fitter II Class (Bar bending)	922.00	Nos	3688.00
		Add for Wedges, Coils, nails @ 1% of materials			50.88
		For Periodical Cleaning, Oiling and Maintenance of MS Sheets, Props and Joists @ 5% of Material			254.42
		Total cost for 33.60 m ²			19934.78
		Rate for 1 sq.m.			593.30 X
144		Supplying and erecting centering for plane surfaces such as RCC Floor/Roof Beam, Lintels, Cantilever Beams, Bed Blocks etc.. with necessary supports and strutting upto 3.60m height in all floors with all cross bracings using MS Sheets made of 10 gauge thick welded with MS angle of Size 25mm x 25mm x 3mm for boarding laid over Steel adjustable Span of Size 2m x 2m (expandable upto 3.60m) and Silver Oak Joists of Size 10 x 5 cm spaced at 50cm to 60cm c/c and supported by Steel Adjustable Telescopic Props of Size 2m x 2m (expandable upto 3.60m) made with outer steel pipe with dia 50mm (3.60mm thick) and inner steel pipe with dia 40mm (2.90mm thick) Spaced at not more than 50 to 60cm c/c, etc complete complying with standard specifications. Steel adjustable span and Steel Adjustable telescopic props shall be provided as directed by the departmental Officers. (Payment for centering shall be given after the concrete is laid).			
		Shuttering area of Beam Taken	83.13	m ²	
		Total Area of MS Sheet Required	92.91	m ²	

		Description	rupees	Per	Amount in rupees
		Total Number of adjustable Telescopic Prop(Vertical) required for Slab (2.00 x 2.00m expandable upto 3.60m)	186.00	Nos	
		Props required as Cross Bracings			
		Total	68.00	nos	
			254.00	Nos	
		Silver Oak Joists required (10.00 x 5.00cm)	2.40	m ³	
		Silver Oak Joists required (7.50 x 5.00cm)	1.13	m ³	
		Total	3.53		
		Add 5% for Wastage	0.18	m ³	
		Total	3.71	m ³	
		Total number of adjustable span of 2m x 2m expandable upto 3.60m	68.00	Nos	
		Sub Data: 1 - Cost of MS Sheet Per Sq.m Per 1 use			
		Cost of MS sheets and angles for each set			
		Weight of MS sheets 10 gauge of size 90cm x 60cm x 3.175mm			
		$3.175 \times 7850 / 1000 \times 0.54 =$	13.46	Kg	
		Weight of MS angles of size 25cm x 25mm x 3mm:			
		$3.6 \times 1.1 \text{ kg / m} =$	4.00	Kg	
13.46	Kg	Cost of MS sheets	53.00	Kg	713.38
4.00	Kg	Cost of MS angles	53.00	Kg	212.00
		Add for cutting, bending, welding charges etc. @ 10% of material cost		LS	92.54
LS					
		Total cost for one set of 0.54m ² (0.9x0.6m) sheet for 40 uses	0.00	Rs.	1017.92
		Total Cost for one Sq.m per 40 uses		Rs.	1017.92
		Total Cost for one Sq.m per 1 use (A)		Rs.	25.45 A
		Sub Data: 2 - Cost of Silver Oak Joists			
3.71	m ³	Cost of Silver Oak Joists	15500.00	m ³	57505.00
		Total for 5 Uses		Rs.	57505.00
		Total for 1 Use		Rs.	11501.00 B
		Sub Data: 3 (Cost of MS Sheet, Telescopic Prop and Adjustable Span)			
254.00	Nos	Cost of Telescopic Steel Props of size 2.0 x 2.0m	1760.00	Nos	447040.00
			2950.00	Nos	200600.00
68.00	Nos	Cost of Adjustable Span			647640.00
		Total for 40 Uses			16191.00
		Total for 1 Use		Rs.	16191.00 C
		Say			
		Main Data for 83.13 m²			
92.91	m ²	Cost of MS Sheets per use (As per A)	25.45	m ²	2364.37
1.00	Use	Cost of Silver Oak Joists (As per B)	11501.00	Use	11501.00
1.00	Use	Cost of Telescopic Steel Props of size 2.0 x 2.0m (As per C)	16191.00	Use	16191.00
			1073.00	Nos	4292.00
4.00	Nos	Carpenter I Class	1025.00	Nos	19475.00
19.00	Nos	Carpenter II Class	716.00	Nos	25060.00
35.00	Nos	Mazdoor Category I	922.00	Nos	5532.00
6.00	Nos	Fitter II Class (Bar bending)			300.56
		Add for Wedges, Coils, nails @ 1% of materials			1502.82
		For Periodical Cleaning, Oiling and Maintenance of MS Sheets, Props, Spans and Joists @ 5% of Material			86218.75
		Total cost for 83.13 m ²			1037.16 X
		Rate for 1 Sq.m			

		Description		rupees	Per	rupees
149		Supplying and erecting centering for plane surfaces such as RCC Floor Slab, Roof Slab, Loft, Landing Slabs, etc with necessary supports and strutting upto 3.60m height in all floors with all cross bracings using MS Sheets made of 10 gauge thick welded with MS angle of Size 25mm x 25mm x 3mm for boarding laid over steel adjustable span of size 2m x 2m (expandable upto 3.60m) and supported by Steel Adjustable Telescopic Props of Size 2m x 2m (expandable upto 3.60m) made with outer steel pipe with dia 50mm (3.60mm thick) and inner steel pipe with dia 40mm (2.90mm thick) , etc complete complying with standard specifications. Steel adjustable span and Steel Adjustable telescopic props shall be provided as directed by the departmental Officers. (Payment for centering shall be given after the concrete is laid).				
		Total area of Slab	=	128.66	m ²	
		Area of Sheet (208 x 0.90 x 0.60m)	=	112.32	m ²	
		Area of Plank (Country wood Plank of 25mm thick upto 30cm wide)		16.34	m ²	
		Total number of sheets required for 128.66 m2		208.00	Nos	
		Add 5% for Overlap and wastage		10.40	Nos	
		Say		11.00	Nos	
		Total		219.00	Nos	
		Total Number of adjustable Telescopic Prop (Vertical) required for Slab (2.00 x 2.00m expandable upto 3.60m)		94.00	Nos	
		Props required as Cross Bracings		72.00	nos	
		Total		166.00	Nos	
		Total number of adjustable span of 2m x 2m expandable upto 3.60m		100.00	Nos	
		Countrywood Plank required (16.34 x 0.025)		0.4085	m ³	
		Add 5% for Wastage		0.0204	m ³	
		Total		0.4289	m ³	
		Sub Data: 1				
		Cost of MS sheets and angles for each set				
		Weight of MS sheets 10 gauge of size 90cm x 60cm x 3.175mm				
		3.175 x 7850 / 1000 x 0.54 =		13.46	Kg	
		Weight of MS angles of size 25cm x 25mm x 3mm:				
		3.6 x 1.1 kg / m =		4.00	Kg	
13.46	Kg	Cost of MS sheets		53.00	Kg	713.38
4.00	Kg	Cost of MS angles		53.00	Kg	212.00
						925.38
					LS	92.54
LS		Add for cutting, bending, welding charges @ 10% of cost of materials				
		Total for one set (A)			Rs.	1017.92 A
		Sub Data: 2 (Cost of CW Plank for 128.66 m²)				
0.4289	m ³	CW Plank upto 30cm wide and 25mm thick		39400.00	m ³	16899.65
		Total for 5 Uses				16899.65
		Total for 1 Use			Rs.	3379.93 B
		Sub Data: 3 (Cost of MS Sheet, Telescopic Prop and Adjustable Span for 128.66 m²)				
219.00	Set	Cost of MS sheets (As per A)		1017.92	Set	222924.04

		Description	rupees	Per	rupees
166.00	Nos	Cost of Telescopic Steel Props of Size 2m x 2m	1760.00	Nos	292160.00
100.00	Nos	Cost of Adjustable Span	2950.00	Nos	295000.00
		Total for 40 Uses			810084.04
		Total for 1 Use			20252.10 C
		Main Data for 128.66 m²			
1.00	Use	Cost of MS Sheets, Telescopic Prop and Adjustable Span	20252.10	Use	20252.10
1.00	Use	Cost of CW Plank (as per C)	3379.93	Use	3379.93
10.00	Nos	Carpenter I Class (as per B)	1073.00	Nos	10730.00
30.00	Nos	Carpenter II Class	1025.00	Nos	30750.00
54.00	Nos	Mazdoor Category I	716.00	Nos	38664.00
10.00	Nos	Fitter II Class (Bar bending)	922.00	Nos	9220.00
		Add for Wedges, Coils, nails @ 1% of materials			236.32
		For Periodical Cleaning, Oiling and Maintenance of MS Sheets, Props, Spans and Planks @ 5% of Material			1181.60
		Total cost for 128.66 m ²			114413.95
		Rate for 1sq.m			889.27 X
158	Providing and laying in position, standardised concrete Mix M-20 Grade by insitu machine mix concrete adopting weighing batch method in accordance with IS 456 using 20mm and down graded hard broken granite stone jelly for all RCC items of works with minimum cement content of 325 kg/m³ and maximum water cement ratio of 0.55, including admixture (plasticiser / super plasticiser) in recommended proportions as per IS:9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability with about (5 cu.m.) 7730 kg. of 20mm machine crushed stone jelly and with about (3.3 cu.m.) 5156 kg. of 10-12mm machine crushed stone jelly and with about (4.79 cu.m) 7670 kg. of crushed stone sand, but excluding cost of reinforcement grill and fabricating charges, centering and shuttering and also including laying, vibrating with mechanical vibrators, finishing, curing, etc. and providing fixtures like fan clamps in the RCC floor/ roof slabs wherever necessary without claiming extra, etc., complete complying with standard specification and as directed by the departmental officers. The coarse and fine aggregates to be used should comply with the requirements of IS standards. (No separate payment will be made by the Department for the excess usage of materials).				
		SUB DATA			
		For machine mix - 20 m ³ per day			
		mixing - 15 bags/hour(1 bag/4 minutes)			
1.00	Day	Mixer machine with hopper	1500.00	Day	1500.00
1.00	Day	Mixer machine driver	741.00	Day	741.00
		Total for 20 cu.m.			2241.00
		Total for 1 cu.m.			112.05 A
		Main Data			
		M 20 CONCRETE			
5.00	cu.m	20mm Machine Crushed Stone Jelly	2024.49	cu.m	10122.45
3.30	cu.m	10-12mm Machine Crushed Stone Jelly	1710.99	cu.m	5646.27
4.79	cu.m	Crushed stone Sand	1686.75	cu.m	8079.53
3250.00	kg	Cement	5996.80	MT	19489.60
19.50	lit	Super Plasticiser @0.60% of cement	43.20	lit	842.40
10.00	cu.m	Charges for mixing by mechanical means (as per sub Data A)	112.05	cu.m	1120.50
0.50	Nos	Mason Ist Class	1098.00	Nos	549.00
2.50	Nos	Mason IInd Class	1025.00	Nos	2562.50
17.50	Nos	Mazdoor Category I	716.00	Nos	12530.00
30.50	Nos	Mazdoor Category II	587.00	Nos	17903.50
		Total for 10 cu.m			78845.75
		For 1cu.m			7884.57
		Add for Vibration charge	103.62	cu.m	103.62 X
		Sub-Total for 1 cu.m.			7988.19
		Add for water charges&other sundries(1%of Sub-Total X)			79.88

		Description	rupees	Per	Amount in rupees
		Rate for 1 cu.m			
		Foundation and Basement	8068.08		8068.08
		Ground Floor	8068.08	131.84	8199.92
		First Floor	8199.92	259.71	8459.63
		Second Floor	8459.63	259.71	8719.34
		Third Floor	8719.34	259.71	8979.05
		Fourth Floor	8979.05	259.71	9238.76
		Fifth Floor	9238.76	259.71	9498.47
168		Supplying, fabricating and placing in position Mild Steel / Ribbed Tor Steel reinforcement grills of all variety like HYSD/CTD/TMT and all grade like Fe 500, Fe550D, Fe 500 D etc., for all RCC works as per design given including cost of steel reinforcement and G.I. binding wire, wastage etc. complete complying with standard specification and as directed by the departmental officers. (Contractor has to make his own arrangements for the supply of steel reinforcement and binding wire)			
		MS (or) RTS rods			
a		For 1 Qtl - upto plinth/Basement level:			
1.02	Qtl	Cost of steel reinforcement	56036.80	MT	5715.75
0.01	Qtl	Binding wire	56.35	Kg	56.35
3.50	Nos.	Fitter Ist Class - Bar Bending	952.00	Each	3332.00
		Rate for 1 Quintal			9104.10
b		Add additional labour for works above plinth/Basement level in every upper floor over the preceding floor or Below Ground level of every 3.50m depth.			
0.20	No	Fitter IInd Class - Bar Bending	922.00	Each	184.40
		Rate for 1 Quintal			184.40
		For Foundation and Basement	9104.10		9104.10
		For Ground Floor	9104.10	184.40	9288.50
		For First Floor	9288.50	184.40	9472.90
		For Second Floor	9472.90	184.40	9657.30
		For Third Floor	9657.30	184.40	9841.70
		For Fourth Floor	9841.70	184.40	10026.10
		For Fifth Floor	10026.10	184.40	10210.50
		For Sixth Floor	10210.50	184.40	10394.90
316		Weathering course in brick jelly lime concrete using broken brick jelly of size 20mm uniform gauge in pure slaked lime (no crushed stone sand to be used) to the proportion of brick jelly to lime being 32:12.5 by volume and laid over the RCC roof slab in a single layer of required slope and finished by beating the concrete with wooden beaters of approved pattern, keeping the surface constantly wet by sprinkling lime jaggery water, etc., complete as per standard specification and as directed by the departmental officers.			
12.80	cu.m.	Brick Jelly (20mm gauge)	977.79	cu.m.	12515.71
5.00	cu.m.	Slaked lime	1129.16	cu.m.	5645.80
1.80	Nos.	Mason I Class	1098.00	Each	1976.40
17.70	Nos.	Mazdoor Category I	716.00	Each	12673.20
14.10	Nos.	Mazdoor Category II	587.00	Each	8276.70
	LS	Sundries for wooden beaters, lime jaggery water		LS	56.46
		Total for 10 cu.m.			41144.27
		Sub Total for 1 cu.m.			4114.43 X
		Add water charges @1% of Sub Total X			41.14
		Rate for 1 cu.m			4155.57

		Description	rupees	Per	Amount in rupees
317		Finishing the top of roof with one course of machine pressed tiles of following size of approved quality set in Cement Mortar 1:3 (One Cement and Three Crushed stone Sand) 12mm thick mixed with water proofing compound conforming to ISS at 2% by weight of cement used and the joints pointed neatly to full depth of tiles with the same cement mortar mixed with red oxide and water proofing compound including curing etc., complete complying with standard specification and as directed by the departmental officers			
		Sub-Data for Pointing with Cement Mortar 1:3			
0.04	cu.m.	Cement Mortar 1:3	4836.81	cu.m.	193.47
0.38	Kg	Water Proofing Compound	42.70	Kg	16.40
2.20	Nos.	Mason II Class	1025.00	Each	2255.00
0.50	Nos.	Mazdoor Category I	716.00	Each	358.00
1.10	Nos.	Mazdoor Category II	587.00	Each	645.70
	LS	Add for red oxide etc.,		LS	9.67
		Total for 10 sq.m.			3478.24
		Rate for 1 sq.m.			347.82
		Main Data			
		Using Pressed Tiles of 230mm x 230mm x 16 mm to 18mm			
	a.				
189.00	Nos.	Pressed Tiles of size 230mm x 230mm x 16 mm to 18mm	16217.70	1000 Nos	3065.15
0.12	cu.m.	Cement Mortar 1:3	4836.81	cu.m.	580.42
10.00	sq.m.	Pointing with Cement Mortar 1:3	347.82	sq.m.	3478.24
1.15	Kg	Water Proofing Compound	42.70	Kg	49.19
1.10	Nos.	Mason I Class	1098.00	Each	1207.80
2.10	Nos.	Mason II Class	1025.00	Each	2152.50
2.20	Nos.	Mazdoor Category I	716.00	Each	1575.20
1.10	Nos.	Mazdoor Category II	587.00	Each	645.70
		Total for 10 sq.m.			12754.20
		Sub Total for 1 sq.m.			1275.42 X
		Add water charges @1% of Sub Total X			12.75
		Rate for 1sq.m.			1288.17
252		Paving the floor with best approved quality fine polished Kota stone slabs of size 600 x 600 and above 20mm thick with machine cut edges laid over a cement mortar bed of 20mm thick using cement mortar 1:3 (One cement and three crushed stone sand) with required Cement Slurry and Mortar Plasticizer fixing the slabs in true right angles with minimum possible width of joints and pointing the joints with white cement mixed with matching colouring pigments and polishing with floor polisher to a high degree of finish etc., complete complying with standard specification and as directed by the departmental officers.(The kota stone slabs and other materials to be used shall be got approved by the Executive Engineer concerned before use on work)			
	a	Using Fine polished Kota Stone Slab 600 x 600 and above with 20 mm thickness			
10.00	sq.m.	Fine polished Kota Stone Slab 600 x 600 and above with 20 mm thick	550.00	sq.m.	5500.00
0.21	cu.m.	Cement Mortar 1:3	4836.81	cu.m.	1015.73
1.10	Nos.	Mason I Class	1098.00	Each	1207.80
2.70	Nos.	Mason II Class	1025.00	Each	2767.50
2.70	Nos.	Mazdoor Category I	716.00	Each	1933.20
3.30	Nos.	Mazdoor Category II	587.00	Each	1937.10
18.00	kg	Cement slurry	5996.80	MT	107.94
4.00	Kg	Colour cement	27.25	Kg	109.00

Sl. No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
			Total for 10 sq.m.			14578.27
			Sub Total for 1 sq.m.			1457.83 X
			Add water charges at 1% of Sub Total X			14.58
			Rate for 1 sq.m.			1472.41
258			Paving the floor with pre-polished concrete anti-skid tiles (Required shape and design) of 20mm thick of approved quality and colour laid in accordance with IS 1443 over a cement mortar bed of 20mm thick in Cement Mortar 1:3 (One Cement and Three crushed stone sand) with required Cement Slurry and Mortar Plasticizer and pointed with white cement mixed with colouring pigment at the rate of 0.40 Kg. / sq.m., curing, etc., complete complying with standard specification and as directed by the departmental officers. (The make and brand of the tiles should be got approved by Executive Engineer before use on works)			
	10.00	sq.m.	Pre-polished concrete anti-skid tiles	525.00	sq.m.	5250.00
	0.21	cu.m.	Cement Mortar 1:3	4836.81	cu.m.	1015.73
	18.00	Kg	Cement slurry	5996.80	MT	107.94
	1.10	Nos.	Mason I st Class	1098.00	Nos.	1207.80
	2.70	Nos.	Mason II Class	1025.00	Nos.	2767.50
	2.70	Nos.	Mazdoor Category I	716.00	Nos.	1933.20
	2.70	Nos.	Mazdoor Category II	587.00	Nos.	1937.10
	3.30	Nos.	Mazdoor Category II	27.25	Kg	109.00
	4.00	Kg	Colour Cement			14328.27
			Rate for 10 sq.m.			1432.83 X
			Sub Total for 1 sq.m.			14.33
			Add water charges at 1% of Sub Total X			1447.16
			Rate for 1 sq.m.			
259			Paving pre-polished concrete anti-skid step tiles (Required shape and design) of 20mm thick of approved quality and colour laid in accordance with IS 1443 in Cement Mortar 1:3 (One Cement and Three crushed stone sand), with required Cement Slurry and Mortar Plasticizer, 20mm thick and pointed with white cement mixed with colouring pigment at the rate of 0.40 Kg. / sq.m., curing, etc., complete complying with standard specification and as directed by the departmental officers. (The make and brand of the tiles should be got approved by Executive Engineer before use on works)			
	10.00	sq.m.	Pre-polished concrete anti-skid step tiles	653.00	sq.m.	6530.00
	0.21	cu.m.	Cement Mortar 1:3	4836.81	cu.m.	1015.73
	18.00	Kg	Cement slurry	5996.80	MT	107.94
	1.10	Nos.	Mason I st Class	1098.00	Nos.	1207.80
	2.70	Nos.	Mason II Class	1025.00	Nos.	2767.50
	2.70	Nos.	Mazdoor Category I	716.00	Nos.	1933.20
	2.70	Nos.	Mazdoor Category I	587.00	Nos.	1937.10
	3.30	Nos.	Mazdoor Category II	27.25	Kg	109.00
	4.00	Kg	Colour Cement			15608.27
			Rate for 10 sq.m.			1560.83 X
			Sub Total for 1 sq.m.			15.61
			Add water charges at 1% of Sub Total X			1576.44
			Rate for 1 sq.m.			

Sl. No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
			Supplying and fixing in position best approved of BIS quality PVC rain water down fall pipes having a pressure of 4 kg. / sq.cm including cost of necessary PVC shoe, PVC bend, cast iron gratings of required diameter and special clamps, brass screws, nails, etc., and fixing of cast iron gratings at junction of parapet and the RCC roof slab including finishing neatly etc., complete. The rate shall be inclusive of cast of removable cast iron grating. The PVC pipe shall be fixed in wall with special type of "U" clamp at the centre of the pipe line in addition to those for more than 3.0 metre pipe length, etc., complete complying with standard specification and as directed by the departmental officers			
			d 110mm dia PVC Pipe for One Floor			
	3.00	RM	Cost of PVC Pipe	203.10	RM	609.30
	1.00	No.	PVC Shoe 110mm dia	83.40	Each	83.40
	1.00	No.	PVC Bend 110mm dia	104.10	Each	104.10
	2.00	Nos.	Cost of brackets for PVC pipes	20.05	Each	40.10
	4.00	Nos.	Cost of teak wood plugs	1.08	Each	4.32
	1.00	No.	Cost of cast iron gratings	32.10	Each	32.10
	1.00	No.	Plumber I Class	952.00	Each	952.00
			Sundries for nails and screws		LS	6.09
			Total for 3 RM			1831.41
			Sub Total for 1 Rm			610.47 X
			Add water charges @1% of Sub Total X			6.10
			Rate for 1RM			616.58
297			Plastering with Cement Mortar 1:5 (One cement and Five Plastering sand), 12mm thick in all floors including mortar plasticizer at 200ml per 50Kg of cement used, curing etc. complete complying with standard specification and as directed by the departmental officers.			
	0.14	cu.m.	Cement mortar 1:5	3632.83	cu.m.	508.595976
	1.1	Nos.	Mason I Class	1098.00	Each	1207.80
	0.5	Nos.	Mazdoor Category I	716.00	Each	358.00
	1.1	Nos.	Mazdoor Category II	587.00	Each	645.70
			Total for 10 sq.m.			2720.10
			Sub Total for 1sq.m.			272.0096 X
			Add water charges @1% of Sub Total X			2.72009598
			Rate for 1sq.m.			274.73
302			Special ceiling plastering and finishing the exposed surface of all RCC items of work such as slabs, beams, sunshades, fascia, canopy slab, staircase waist slab, landing slab etc., with Cement Mortar 1:3 (One Cement and Three Plastering Sand) 10mm thick including mortar plasticizer at 200ml per 50Kg of cement used, hacking the surfaces and curing, etc., in all floors complying with standard specification and as directed by the departmental officers			
	0.1	cu.m.	Cement mortar 1:3	4841.81	cu.m.	484.1814
	1.1	Nos.	Mason I Class	1098.00	Each	1207.80
	1.1	Nos.	Mazdoor Category I	716.00	Each	787.60
	1.1	Nos.	Mazdoor Category II	587.00	Each	645.70
			Total for 10 sq.m.			3125.28
			Sub Total for 1sq.m.			312.53 X
			Add water charges @1% of Sub Total X			3.13
			Rate for 1sq.m.			315.65

No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
1			Painting two coats of newly plastered wall surface with ready mixed plastic Interior emulsion paint of first class quality and of approved colour over a priming coat including thorough scrapping, clean removal of dirt, and including necessary plaster of paris putty, wherever required etc., complete complying with standard specification and as directed by the departmental officers.			
	10.00	sq.m.	Cleaning the plastered surface			
	1.40	Litre	Plastic Interior emulsion paint	5.78	sq.m.	57.80
	0.98	Litre	Primer	295.60	Litre	413.84
	2.20	Nos.	Painter I Class	147.50	Litre	144.55
		LS	Sundries for brushes, crushed stone sandpaper, plaster of paris putty, etc.	876.00	Each	1927.20
			Total for 10 sq.m.		LS	5.58
			Sub Total for 1sq.m.			2548.97
			Add water charges @1% of Sub Total X			254.90
			Rate for 1sq.m.			2.55
						257.45
394			Painting two coats of newly plastered wall surface with ready mixed plastic Exterior emulsion paint of first class quality and of approved colour over a priming coat including thorough scrapping, clean removal of dirt, and including necessary plaster of paris putty, wherever required etc., complete complying with standard specification and as directed by the departmental officers.			
	10.00	sq.m.	Cleaning the plastered surface			
	1.40	Litre	Plastic Exterior emulsion paint	5.78	sq.m.	57.80
	0.98	Litre	Primer	303.80	Litre	425.32
	2.20	Nos.	Painter I Class	151.30	Litre	148.27
		LS	Sundries for brushes, crushed stone sandpaper, plaster of paris putty, etc.	876.00	Each	1927.20
			Total for 10 sq.m.		LS	5.74
			Sub Total for 1sq.m.			2564.33
			Add water charges @1% of Sub Total X			256.43
			Rate for 1sq.m.			2.56
						259.00
1			Providing Black board in two layers with first layer in cement mortar 1:5 (one cement and five crushed stone sand) 20mm thick and the second layer in Combination mortar 1:1:6 (one cement one lime and six crushed stone sand) 20mm thick and providing band all round the black board in c.m 1:5 (one cement and five crushed stone sand) for 20mm thick and 50mm width including cost of one coat of block oxide paint of approved quality complying with standard specification.			
			plastering with CM 1:5, 20mm thick-10sq.m			
	0.22	cu.m.	Cement mortar 1:5	3632.83	cu.m.	799.22
	2.20	Nos.	Mason I Class	1098.00	Each	2415.60
	0.50	Nos.	Mazdoor Category I	716.00	Each	358.00
	3.20	Nos.	Mazdoor Category II	587.00	Each	1878.40
			Total for 10 sq.m.			5451.22
			Rate for 1 sq.m.			545.12
			Combination mortar 1:1:6-20mm thick 10sq.m			
	53.00	kg	Cost of cement	5996.80	MT	317.83
	0.03	cu.m	Slacked lime	1129.16	cu.m.	33.87
	0.22	cu.m	Cost of Crushed Stone Sand	1686.75	cu.m.	371.09
	0.22	cu.m	Mixing charges	127.60	cu.m.	28.07
	2.20	nos	Mason I class	1098.00	Each	2415.60
	0.50	nos	Mazdoor Category I	716.00	Each	358.00
	3.20	nos	Mazdoor Category II	587.00	Each	1878.40
			Total for 10 sq.m			5402.86

Sl. No.	Qty.	Unit	Description	Rate In rupees	Per	Amount in rupees
			Rate for 1 sq.m			
			Black board painting -10 sq.m			540.29
	1.44	lit	Black oxide paint			
	0.70	nos	Painter 1 class	100.00	lit	144.00
			Total for 10 sq.m	876.00	Each	613.20
			Rate for 1 sq.m			757.20
			MAIN DATA			75.72
			Consider a black board of size 2.2mx1.0m			
	2.20	sq.m	plastering with CM 1:5,20mm thick			
	2.00	sq.m	Combination mortar 1:1:6	545.12	sq.m	1199.27
	1.71	sq.m	Black oxide paint	540.29	sq.m	1080.57
			Total for 2.20 sq.m	75.72	sq.m	129.48
						2409.32
			Sub Total for 1 sq.m			1095.15 X
			Add water charges @1% of Sub Total X			10.95
			Rate for 1 sq.m			1106.10

Manufacturing supplying and fixing of Fully panelled steel door with the following specification MS angles of size 40x40x6mm are used for the outer frames and M.S. angles of size 35x35x6mm for the shutter frames stiffeners with 32 x 6mm M.S flat is provided at required intervals in the shutter frame. 18-gauge C.R. sheet laid as panel in the shutter and welded intact. M.S. flat 18x5mm is welded over the 32 x 6mm M.S. flat sandwiching the C.R. sheet in between additional stiffeners with 18x5mm M.S. flat is provided diagonally at the rear side of the shutter, 3nos. of Steel Parliament Hinges of Size 125mm x 150mm in case of single leaf and 6nos. of Steel Parliament Hinges of Size 125mm x 150mm in double leaves shutter to be provided 6nos. of holdfasts 200 mm in length made of angle section spliced at the ends are welded to the outer frames of the door. Tower bolts 4nos. One the top of each shutter, one at lock rail and the other at the bottom are provided. 1no. Aldrop is provided at inner lock rail section in the door 3 Nos of handle are to be provided, one more aldrop is provided in the additional provision for locking arrangements for the inner side of the door and appropriate place. Incase of double leaf door M.S.Flat 32 x 3mm at 1.1Kg/m is provided on the one shutter to conceal the gap between the two shutters.at an appropriate place in the door. A tie bar is provided at the bottom of the frame to prevent twisting of frame during transportation and fixing. All members are given a coat of red oxide primer as directed by the departmental officers. The rate includes cost of all materials, labour charges, transportation to site of work, loading, un loading and all other incidental charges etc.,complete complying with standard specification and as directed by the departmental officers. - Double leaf of size 1.20m x 2.10m.

b, Double Leaf		1.20x2.10m (Fully panned)			
	Area		2.52	Sq.m	
	Door outer frame 40x40x6		18.9	kg	
	Shutter frame 35x35x6/2(2x2.088)+2x0.594)		27.89	kg	
	Tie bar 1x1.2=1.2x1.5		1.8		
	Vertical rod 1 x 2.10 x 1.10 kg/m		2.31		
	Stiffeners with MS flats of 32x6mm				
	6Nosx2x0.594x0.70kg/m		4.99	kg	
	Diagonal flats 2x2x0.688x1.5kg/m		4.13	kg	
			60.02	kg	
	Add 5% wastage		3	kg	
	Total steel weight		63.02	kg	
	CR sheet 18G=2X0.594X2.088X9.80kg 24.31kg/m		24.31		
	Add 5% wastage		1.22		
			25.53		
	Painting priming coat=2x0.6x2.10x2.20		5.54		
	Main Data				
63.02	kg	Ms Angle & Flats	52.55	kg	3311.70
25.53	kg	18GCRS	56.35	kg	1438.62
84.33	kg	Labour for cutting sheets, angles fabrication & finishing	56.27	kg	4745.25

No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
	5.54	Sq.m	Priming Coat	80.44	Sq.m	445.63
	6.00	Nos	Hold Fast 200mm length	168.00	Each	1008.00
	6.00	Nos	Steel Parliament Hinges of Size 125mm x 150mm	375.00	Each	2250.00
	3.00	Nos	Tower Bolt 250mm long 12mm dia	97.85	Each	293.55
	1.00	Nos	Tower Bolt 200mm long 12mm dia	82.25	Each	82.25
	1.00	No	Aldrop 250mm long 16mm dia	181.00	Each	181.00
	3.00	Nos	Ms Handle 200mm long	64.25	Each	192.75
	2.52	Sq.m	Labour for fixing the Door & furniture fittings	251.35	Sq.m	633.40
			Conveyance, Handling, Scaffolding, wind appliances, Chipping/Masonry concrete & making good the damaged portion		L.S.	237.52
			Rate for 2.52Sq.m			14819.66
			Sub Total for 1 Sq.m			5880.82 X
			Add water charges @1% of Sub Total X			58.81
			Rate for 1 Sq.m			5939.63

Fabricating, supplying and fixing of steel Emergency exitdoor cum, emergency window with the following specification. M.S. angle in size 40x40x6mm are used for the outer frames and M.S. angle of size 35x35x5mm for the shutter frame, stiffners with 32x6mm M.S. flats provided at required intervals in the shutter frames 18 gauge CR sheet is laid as panel and welded instant for 1/3 bottom portion of the shutter, M.S. flat 18x5mm is welded over the 32x6mm M.S flat sandwiching the CR sheet in between additional stiffner with 18x5mm M.S. flat is provided diagonally at the rear-side of the shutter. The balance 2/3 portion at top is provided with grill at an average weight of 15kg/Sq.m and the top portion of operation emergency window is to be made of 25x25x3mm M.S. angle welded intact with CR sheet and 25x3mm M.S. flat at diagonally at the near side of the window at required intervals 6 Nos. of Steel Parliament Hinges of Size 125mm x 150mm to be provided, 6 Nos of holdfast 200mm in length made of angle section spliced at the ends are welded to the outer frame of the door. 200mm in length made of angle section spliced at the ends are welded to the outer frame of the door. Tower bolts 4nos. One the top of each shutter, one at lock rail and the other at the bottom are provided. one aldrop is provided at an appropriate place in the door 2 Nos. of 'D' type handle for emergency window and 2 Nos of handle for door is to be provided at appropriate places. A tie bar is provided at the bottom of the outer frame to prevent twisting of frame during transportation of fixing. All members are given one coat of red oxide primer as directed by the departmental officers. The rate includes cost of materials, labour transportation to side of works, loading, unloading and all other incidental charges etc., complete complying with standard specification and as directed by the departmental officers. - Double leaf of size 1.20m x 2.10m.

Double leaf door
Consider a door size 1.20x2.10 Area = 2.52
Sq.m

Door Outer frame 40x40x6mm

Vertical 2x2.10

Top Horizontal 2x1.20

6.60x3.50kg/m

Shutter frame 35x35x5

Vertical 2x2x2.088x2.60 kg/m

Horizontal 2x2x0.584x2.60 kg/m

tie bar at bottom of door 32x6mm of 1.50kg

1.20x1.50 kg/m

For locking rail using 32x6mm flat

2x0.584x1.50 kg/m

Stiffners at rear side

Horizontal 2x3x0.584x0.70 kg/m

Vertical 2x4x0.91x0.70 kg/m

Stiffners at door joining using 32x3mm flat in door side

Sl. No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
			1x2.10x1.10 kg/m			
			For openable window 25x25x3mm angle	2.31	kg	
			Horizontal 2x2x0.584x1.10 kg/m	2.5696	kg	
			Vertical 2x2x1.30x1.10 kg/m	5.72	kg	
			Stiffners for window 25x3mm flat			
			2x2x1.43x0.59			
			Total	3.3748	kg	
			Add 5% for wastage	75.964	kg	
				3.7982		
			M.Sgrill 2x0.584x1.288x15	79.7622		
			Add 5% for wastage	22.56576	Kg	
				1.128288		
			18 gauge CR sheet	23.7	kg	
			For door 2x0.584x0.80x9.80 kg	9.15712		
			For window 2x0.584x1.288x9.80 kg	14.742963		
				23.900083	kg	
			Add 5% for wastage	1.2	kg	
				25.100083	kg	
			Painting area			
			1x1x1.20x2.10x2.20	5.544	Sq.m	
			Main data			
79.76	Kg		M.S Angle & flat	52.55	Kg	4191.39
25.10	Kg		C.R.Sheets 18G	56.35	Kg	1414.39
23.7	Kg		M.S.Grill With primer	106.40	Kg	2521.76
5.544	Sq.m		Priming coat	80.44	Sq.m	445.95
99.86	Kg		Labour for cutting & welding, fabrication charges	56.27	Kg	5619.12
6.00	Nos		Hold fast 200mm length	168.00	No	1008.00
6.00	Nos		Steel Parliament Hinges of Size 125mm x 150mm	375.00	No	2250.00
3.00	Nos		Steel Tower bolt 250mm long 12mm dia	97.85	No	293.55
1.00	Nos		Steel Tower bolt 200mm long 12mm dia	82.25	No	82.25
1.00	No		Steel Aldrops 250mm long 16mm dia	181.00	No	181.00
4.00	Nos		M.S.Handles 200mm long	64.25	No	257.00
2.52	Sq.m		Labour charges for fixing door & Furniture fittings	251.35	Sq.m	633.40
L.S			Fixing furnitures cost of conveyance loading &			280.29
			Rate for 2.52Sq.m			19178.10
			Sub Total for 1 Sq.m			7610.36 X
			Add water charges @1% of Sub Total X			76.10
			Rate for 1 Sq.m			7686.46
448			Fabricating, Supplying and fixing in position of steel sheeted windows (Three Leaves) with the following specifications. Outer frames of windows made of 'Z' section F7D of size 33 x 25 x 3mm at 1.419 kg/ m and mullion 'J' section (F4B) of size 46x25x3mm at 2.28kg/m and shutter section of made of F7D of 33x25x3mm at 1.419 kg/m as specified in IS 7452/1990. Each openable shutter should not exceed a width of 600mm to enable separate operations and easy maintenance. The panel of the shutters to be covered with 18 gauge cold rolled sheet of superior quality and welded intact with shutter frames. Horizontal stiffeners using 18x5mm MS Flat at 0.70kg/m at 3 Nos. for each shutter and additional diagonal stiffners of the same MS flats at all the four corners of each shutters to the suitable length welded to the shutters, for holding the CR Sheets in position firmly.			
			2 numbers of Steel Offset Pivot hinges of size 3" and one number of handle-cum-latch of special type made with 18x5mm MS flats are revetted to the shutters at an appropriate height in window. suitable opening is left for its easy operation. a stopper square rod for handle is provided in the mullion section at suitable place to catch the window handle. each window shutter having an adustable stay made out of 18 x 5mm at 0.70 kg/ m MS flat of lenght 320mm with three adjustable position. A matching peg is provided in the outer frame of the window at suitable place. 4 Nos. of hold fasts of 200mm length spliced at the ends are welded to the outer frame of the window by using MS flat of 18x5mm at 0.70kg/m, welded to the shutter at two place equivalent from each from top and bottom of the shutter.			

S. No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
			An MS square bar of 12mm size is welded to the inner face of the window at an equal interval not exceeding 100mm edge between them. All members are painted with one coat of anti-corrosive red oxide primer as directed by the departmental officers. All sections should be in confirmed with IS 7452/1990. The cost includes cost of all materials, labour charges and other incidental charges, etc., complete complying with standard specification and as directed by the departmental officers.			
			Three Leaves - 1.50x1.30m			
			Area of window 1.95 Sq.m			
			Outer frame F7D section 33x25x3mm			
			Horizontal : 1x2x1.50x1.419 kg/m	4.26	kg	
			Vertical : 1x2x1.30x1.419 Kg/m	3.69	kg	
			Shutter frame F7D section 33x25x3mm			
			Horizontal : 3x2x0.46x1.419 kg/m	3.92	kg	
			Vertical : 3x2x1.26x1.419 Kg/m	10.73	kg	
			J' Section centre Mullion F4 'B' section			
			1x2x1.26x2.28 kg/m	5.75	kg	
				28.35	kg	
			Add 5% wastage	1.42	kg	
				29.77	kg	
			MS flats for stiffeners 18mmx5mm size at 0.70kg/m			
			Horizontal stiffeners = 3x3x0.44x0.70kg/m	2.77	kg	
			Diagonal 3x4x0.08x0.70 kg/m	0.67	kg	
				3.44	kg	
			Add 5% wastage	0.17	kg	
				3.61	kg	
			MS bar 12Nos (12mm dia)			
			1x12x1.50x1.13kg/m	20.34	kg	
			Add 5% wastage	1.02	kg	
				21.36	kg	
			CR sheet of 18kg @ 9.80 kg/Sq.m			
			1.45x1.25x9.80	17.76	kg	
			Add 5% wastage	0.89	kg	
				18.65	kg	
			Area of priming coat			
			For window 1.50x1.30x2.20	4.29	Sq.m	
			For MS rods 12x0.048x1.50	0.86	Sq.m	
				5.15	Sq.m	
			Main data			
	29.77	kg	Steel Special extruded Section including fabrication charges	69.60	kg	2071.99
	3.61	kg	MS Flats and Angles	52.55	kg	189.71
	18.65	kg	CRS 18G	56.35	kg	1050.93
	21.36	kg	MS Rod 12mm dia	52.10	kg	1112.86
	20.34	kg	Fixing MS rod	32.62	kg	663.49
	21.20	kg	Labour for cutting angles, CRS, Welding & fabrication charges	56.27	kg	1192.92
	1.95	Sq.m	Labour for fixing windows & furniture	251.35	Sq.m	490.13
	3.00	Nos	Window Stay	156.90	Each	470.70
	4.00	Nos	Hold Fast of 200 mm	168.00	Each	672.00
	6.00	Nos	Steel Offset Pivot hinges of size 3"	400.00	Each	2400.00
	3.00	Nos	Steel Handles 150mm long	57.65	Each	172.95
	5.15	Sq.m	Priming Coat	80.44	Sq.m	414.26
			Conveyance, Handling, Scaffolding, Chipping Masonary concrete & making good the damaged portion		L.S.	103.60
			Rate for 1.95Sq.m			11005.53
			Sub Total for 1 Sq.m			5643.86 x
			Add water charges @1% of Sub Total X			56.44
			Rate for 1 Sq.m			5700.30

Sl. No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
	Manufacturing, supplying and fixing of Entrance steel doors with the following specification M.S angles of a size 40x40x6mm are used for the outer frames and M.S. angles of size 35x35x5mm for the shutter frames stiffeners with 32x6mm M.S. flat is provided at required intervals in the shutter frames 18 gauge C.R. sheet is laid as panel in the shutter and welded intact for 1/3 bottom portion of the shutter. M.S. flat 18x5mm is welded over the 32x6mm M.S. flat sand witching the CR sheet in between. Additional stiffener with 18x5mm M.S. flat is provided diagonally at the rear side of the shutter. The balance 2/3 portion at top is provided with grill at an average weight of 20 kg/sq.m with 300mm hieght of fixed glazing at top with 3mm thick Pin Headed glass including 6 Nos Steel Parliament Hinges of Size 125mm x 150mm for double leaves shutter to be provided 6nos of holdfasts 200mm in length made of angle section spliced at the ends are welded to the outer frame of the door. Tower bolts 4nos. One the top of each shutter, one at lock rail and the other at the bottom are provided. one aldrip is provided at on appropriate place in the door. 3 Nos of handle are to be provided. A Tie bar is provided at the bottom of the outer frame to prevent twisting of frame during transportation or fixing. All members are given one coat of red oxide primer as directed by the departmental officers. The rate includes cost of all materials, labour charges,taxes, transportation to site of work , loading, unloading and all other incidental charges etc., complete complying with standard specification and as directed by the departmental officers. - Double leaf of size 1.50m x 2.40m.					
			Area 1.50 x 2.40 = 3.60 Sq.m(1/3 panneled& 2/3 grilled with top ventilator glazing)			
			Door size 1.5 X 2.1M			
			Fixed glazing at top 1.5 x 0.3m			
			Materials required			
			Outer frame 40x40x6mm			
			Vertical 2x2.4	4.8	m	
			Horizontal 1x1.50	1.5	m	
				6.3	m	
			6.30x3.5Kg/m	22.05	Kg	
			Shutter frame 35x35x5mm			
			Vertical 2x2x2.06	8.24		
			Horizontal 2x2x0.71	2.84		
			11.08x2.6Kg/m	28.808	Kg	
			For fixed portion (0.26+1.42)x2.60kg/m	4.37	Kg	
			Stiffeners 18x 5 mm MS flat at rear side			
			Horizontal 2x2x0.71x1.50 Kg/m	4.26	Kg	
			Diagonal 2x2x0.98x1.50 Kg	5.88	Kg	
			Tie bar 30x6mm 2x0.71x1.50 Kg/m	2.13	Kg	
			Total weight of MS flats and angles	67.498	Kg	
			Add 5% wastage	3.3749	Kg	
				70.8729	Kg	
			CR Sheet 18G reqd. 1x2x0.71x0.7x9.8 Kg/Sq.m	9.74	Kg	
			Add 5% wastage	0.487	Kg	
				10.227	Kg	
			MS grill of 20 kg/Sq.m 2x0.72x2.06x2/3=	1.98	Sq.m	
			1.98x20 Kg/Sq.m =	39.6	Kg	
			Add 5% wastage	1.98	Kg	
				41.58	Kg	
			3mm tk pin headed glass			
			Glazing for fixed portion 1.42x0.26=	0.37	Sq.m	
			Add 10% wastage	0.037	Sq.m	
				0.407	Sq.m	
			Teakwood beading for glazing area			
			2x(0.26+1.40)	3.32	Rm	
			Painting Red oxide primer			
			Total area 3.60Sq.m			
			Deduct glazed area and Grill area			
			3.6-(0.37+1.98)x2 = 1.25x2	2.5	Sq.m	
			Main Data			
	70.87	kg	MS angles & Flats	52.55	kg	3724.22
	10.23	kg	CR sheet 18 gauge	56.35	kg	576.46

Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
41.58	kg	MS grill of appd design 20kg/Sq.m including fabrication charges	106.40	kg	
0.41	Sq.m	3mm thick Pinheaded glass			4424.26
3.32	Rm	Teakwood Beading 15mm x 12mm	226.60	Sq.m	92.91
		Labour charges for cutting welding and fabrication	15.45	Rm	51.29
77.24	Kg	of angles sheets in position & fixing	56.27	kg	
2.50	Sq.m	Priming coat			4346.29
6.00	Nos	Hold Fast 200mm length	80.44	Sq.m	201.10
6.00	Nos	Steel Parliament Hinges of Size 125mm x 150mm	168.00	Each	1008.00
			375.00	Each	
3.00	Nos	Steel Tower Bolt 250mm long 12mm dia	97.85	Each	2250.00
1.00	Nos	Steel Tower Bolt 200mm long 12mm dia	82.25	Each	293.55
1.00	No	Steel Aldrop 250mm long 16mm dia	181.00	Each	82.25
3.00	Nos	Ms Handle 200mm long	64.25	Each	181.00
3.60	Sq.m	labour charges for fixing door	251.35	Sq.m	192.75
		Conveyance, Handling, Scaffolding, wind appliances, Chipping masonry, concrete etc & redoing the same			904.86
LS				LS	
		Rate for 3.60Sq.m			215.03
		Sub Total for 1 Sq.m			18543.97
		Add water charges @1% of Sub Total X			5151.10 X
		Rate for 1 Sq.m			51.51
					5202.61
5		Supplying and fixing Mild Steel grills for windows, ventilators etc., complete complying with standard specifications and as directed by the departmental officers.			
1.00	kg	Supplying Mild Steel grills for windows, ventilators etc., including priming coat as per SOR Item No. M-0196	70.15	kg	70.15
1.00	kg	Fixing in position of MS Grills as per SOR item no : W-0168	35.20	kg	35.20
		Sub Total for 1 kg			
		Add water charges @1% of Sub Total X			105.35
		Rate for 1 kg			1.05
1		Supplying and Fixing MS Ladder width 45cm using 50x50x6mm MS Angle.			106.40
		50x50x6mm Angle required.			
		side = 1x2x3	6m		
		6.00x4.42 Kg/m		26.52	
		Step = 1x10x0.40	4m		
		4.00x3.48 Kg/m		13.92	
		Primer area	40.44	kg	
		50x50x6mm Angle = 6x0.20	1.20		
			0.64		
			1.84	sq.m	
40.44	kg	Main Data			
40.44	kg	Cost of M.S. Angle			
1.84	sq.m	Labour charges	53.00	kg	2143.32
LS		Priming one coat	56.27	kg	2275.56
		Conveyance	80.44	sq.m	148.01
		Rate for 3 RM		LS	214.33
		Sub Total for 1 Rm			4781.22
		Add water charges @1% of Sub Total X			1593.74 X
		Rate for 1 RM			15.94
					1609.68

Sl. No.	Qty.	Unit	Description	Rate in rupees	Per	Amount in rupees
1			Manufacturing, supplying and fixing Precast Reinforced Cement Concrete slabs of following thickness in RCC 1:2:4 (one cement, two crushed stone sand and four aggregates), using following HBGS jelly excluding cost of reinforcement steel in position but including cost of moulding charges, casting of slab, finishing, curing and fixing in position in all floors etc., complete complying with standard specification and as directed by the departmental officers.			
			50mm thick slab (using 20mm HBGS Jelly)			
			Consider a slab of size = 1.00 x 0.45m			
			Area = 1 x 1.00 x 0.45	0.45	sq.m.	
			Mould:			
			Country wood of size	2.20	RM	
			0.025 x 0.05 required = 2 x 1.10 =			
			2 x 0.55	1.10	RM	
			Total	3.30	RM	
			(or) 3.30 x 0.050 x 0.025 = 0.004125 (or)	0.0041	cum	
			CC 1:2:4			
			1.00 x 0.45 x 0.05 =	0.0225	cu.m.	
			Sub-Data for Mould			
	0.0041	cu.m.	Cost of country wood	34300.00	cu.m.	140.63
	0.0041	cu.m.	Labour wrought put up	24905.89	cu.m.	102.11
		LS	Sundries for nails, oiling the mould etc.		LS	10.21
			Cost for mould for 5 uses			252.96
			Cost for 1 use			50.59
			DATA			
	0.0225	cu.m.	CC 1:2:4 using 20mm HBGS Jelly	7525.39	cu.m.	169.32
	1.00	use	Cost of mould	50.59	1 use	50.59
		LS	Add for finishing, curing, lifting and placing in position		LS	16.93
			Rate for 0.45 sq.m.			236.84
			Sub Total for 1 Sqm			526.32 X
			Add water charges @1% of Sub Total X			5.26
			Rate for 1 sq.m.			531.58

5.8/2
(14/7/25)
Assistant Engineer, P.W.D.,
Buildings (C&M) Section,
Singampunari.

Assistant Executive Engineer, P.W.D.,
Buildings (C&M) Sub Division,
Karaikudi.

Executive Engineer, P.W.D.,
Buildings (C&M) Division,
Sivagangal.

14/7/25
14/7/25

of Work :-
 truction of 3 Class Room Building in Government Higher Secondary School at Mithravayal in
 angai District.

Abstract

Qty	Description	Rate	units	Amount
319.00	Earth work excavation for foundation in all soils and sub soil and to full depth as may be directed except in hard rock requiring blasting but including shoring, strutting and balling out water wherever necessary and refilling the sides of foundation with excavated earth in layers of not more than 15cm thick well rammed consolidated and depositing the surplus earth within the compound with an initial lead of 10 metres and lift of 2 metres in places shown by the departmental officers clearing, leveling the site etc., complete complying with standard specification.	358.08	Cum	114228.00
27.60	Supplying and filling in foundation, basement, etc with stone dust in layers of not more than 15 cm thick well watered, rammed and consolidated etc. complete complying with standard specification and as directed by the departmental officers.	478.39	cum	13204.00
88.20	Supplying and filling in foundation, basement, etc with conveyed earth in layers of not more than 150mm thick layers well watered, rammed with surface vibrator and consolidated including conveyance charges etc. complete complying with standard specification and as directed by the departmental officers.	354.04	cum	31226.00
34.00	Refilling with excavated earth other than sand with an initial head load of 100 mts. and depositing the earth as shown by the departmental officers in layers of not more than 15 cm thick well rammed, watered and consolidated etc. complete complying with standard specification	151.60	cum	5154.00
18.00	Cement Concrete 1:5:10 (One Cement, Five Crushed Stone Crushed Stone Sand (M-Sand)) and Ten hard broken stone jelly) using 40 mm gauge hard broken granite stone jelly for foundation including dewatering wherever necessary and laid in layers of not more than 15 cm thick well rammed, consolidated and curing etc. complete complying with standard specification	5366.18	cum	96591.00
19.00	Cement concrete 1:5:10 (one cement, five Crushed stone M-Sand and ten broken stone) using hard broken granite stone jelly 40mm gauge for flooring including dewatering if found necessary and laid in layers of not more than 15cm thick in the case of foundation etc. complete complying with standard specification	5366.18	cum	101957.00

SL No	Qty	Description	Rate	units	Amount
7	12.10	Brick work in Cement Mortar 1:5 (one Cement and Five crushed stone Sand (M Sand))using best quality of Country bricks 8-3/4"x4-1/4"x2-3/4 including Pointing with same mortar levelling and curing, etc., complete complying with standard specification. In Foundation and Basement	6380.55	cum	77205.00
8		Brick work in Cement Mortar 1:6 (one Cement and Six crushed stone Sand (M Sand))using best quality of Country bricks 8-3/4"x4-1/4"x2-3/4" including Pointing with same mortar levelling and curing, etc., complete complying with standard specification.			0.00
a	29.00	In Foundation & Basement	6304.22	cum	182822.00
b	58.00	In Ground floor	6391.01	cum	370679.00
9		Brick partition walls using best quality of Country bricks 8-3/4" x 4-1/4" x 2-3/4" in Cement Mortar 1:3 (One Cement and Three crushed stone Sand (M Sand)) using hoop iron reinforcement if found necessary including curing etc. complete and as directed by the departmental officers. (Hoop iron reinforcement will be measured and paid for separately)			0.00
a	5.70	In Ground floor	849.66	Sq.m	4843.00
10	149.00	Supplying and erecting steel centering including necessary supports for plane surfaces for Reinforced Cement Concrete works such as column footings, column pedestals, plinth beams, grade beams, staircase steps, Sill slabs etc. which require only nominal strutting using mild steel sheets of size 90cm x 60cm and 10 BG stiffened with welded mild steel angles of size 25mm x 25mm x 3 mm for boarding, laid with silver oak joists of size 10cm x 5cm & 7.5cm x 5cm as support runner , vertical stiffener , side support and Top Horizontal stiffener spaced at about 60cm to 90cm centre to centre or at suitable intervals etc. complete in all floors complying with standard specification. (Payment for centering shall be given after the concrete is laid).	657.61	Sq.m	97984.00
11	207.00	Supplying and erecting steel centering including necessary supports For plane surfaces such as rectangular or square RCC columns etc. which require only nominal strutting using mild steel sheets made of 10 gauge thick welded with MS angle size 40mm x 40mm x 5 mm and supported by Steel Adjustable Telescopic Props of Size 2m x 2m (expandable upto 3.60m) made with outer steel pipe with dia 50mm (3.60mm thick) and inner steel pipe with dia 40mm (2.90mm thick).etc..complete in all floors complying with standard specification. Steel Adjustable telescopic props shall be provided as directed by the departmental Officers. (Payment for centering shall be given after the concrete is laid).	516.93	Sq.m	107005.00

Qty	Description	Rate	units	Amount
133.00	Supplying and erecting centering for plane surfaces such as RCC Floor/Roof Beam, Lintels, Cantilever Beams, Bed Blocks etc.. with necessary supports and strutting upto 3.60m height in all floors with all cross bracings using MS Sheets made of 10 gauge thick welded with MS angle of Size 25mm x 25mm x 3mm for boarding laid over Steel adjustable Span of Size 2m x 2m(expandable upto 3.60m) and Silver Oak Joists of Size 10 x 5 cm spaced at 50cm to 60cm c/c and supported by Steel Adjustable Telescopic Props of Size 2m x 2m (expandable upto 3.60m) made with outer steel pipe with dia 50mm (3.60mm thick) and inner steel pipe with dia 40mm (2.90mm thick) Spaced at not more than 50 to 60cm c/c , etc complete complying with standard specifications. Steel adjustable span and Steel Adjustable telescopic props shall be provided as directed by the departmental Officers. (Payment for centering shall be given after the concrete is laid).	1037.16	Sq.m	137942.00
185.10	Supplying and erecting centering for plane surfaces such as RCC Floor Slab, Roof Slab, Loft, Landing Slabs, etc with necessary supports and strutting upto 3.60m height in all floors with all cross bracings using MS Sheets made of 10 gauge thick welded with MS angle of Size 25mm x 25mm x 3mm for boarding laid over steel adjustable span of size 2m x 2m (expandable upto 3.60m) and supported by Steel Adjustable Telescopic Props of Size 2m x 2m (expandable upto 3.60m) made with outer steel pipe with dia 50mm (3.60mm thick) and inner steel pipe with dia 40mm (2.90mm thick) , etc complete complying with standard specifications. Steel adjustable span and Steel Adjustable telescopic props shall be provided as directed by the departmental Officers. (Payment for centering shall be given after the concrete is laid).	768.34	Sq.m	142220.00

Sl. No	Qty	Description	Rate	units	Amount
14		Providing and laying in position, standardised concrete Mix M-20 Grade in accordance with IS:456-2000, using 20mm and down graded hard broken granite stone jelly for all RCC items of works with minimum cement content of 325 kg/m ³ and maximum water cement ratio of 0.55, including admixture (plasticiser / super plasticiser) in recommended proportions as per IS:9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability with about (5 cu.m.) 7730 kg. of 20mm machine crushed stone jelly and with about (3.3 cu.m.) 5156 kg. of 10-12mm machine crushed stone jelly and with about (4.79 cu.m') 7670 kg. of crushed stone sand (M-sand), but excluding cost of reinforcement grill and fabricating charges, centering and shuttering and also including laying, vibrating with mechanical vibrators, finishing, curing, etc. and providing fixtures like fan clamps in the RCC floor/ roof slabs wherever necessary without claiming extra, etc., complete complying with standard specification and as directed by the departmental officers. The coarse and fine aggregates to be used should comply with the requirements of IS standards. (No separate payment will be made by the Department for the excess usage of materials).			0.00
a	71.00	In Foundation & Basement			
b	47.00	In Gound floor	8068.08	cum	572834.00
15		Supplying, fabricating and placing in position M.S or R.T.S reinforcements grill for RCC works as per the design given including cost of steel and G.I black binding wire etc., complete complying with standard specification. (The contractor will have to make his own arrangements for the supply of MS plain rod / RTS rod and GI binding wire).	8199.92	cum	385396.00
a	57.80	In Foundation & Basement			0.00
b	67.10	In Gound floor	9104.10	Qtl	526217.00
16	16.00	Weathering course in brick jelly lime concrete using broken brick jelly of size 20mm uniform gauge in pure slaked lime (no crushed stone sand to be used) to the proportion of brick jelly to lime being 32:12.5 by volume and laid over the RCC roof slab in a single layer of required slope and finished by beating the concrete with wooden beaters of approved pattern, keeping the surface constantly wet by sprinkling lime jaggery water, etc., complete as per standard specification and as directed by the deparmental officers.	9288.50	Qtl	623258.00
			4155.57	cum	66489.00

Qty	Description	Rate	units	Amount
201.00	Finishing the top of roof with one course of machine pressed tiles of following size of approved quality set in Cement Mortar 1:3 (One Cement and Three Crushed stone Sand) 12mm thick mixed with water proofing compound conforming to ISS at 2% by weight of cement used and the joints pointed neatly to full depth of tiles with the same cement mortar mixed with red oxide and water proofing compound including curing etc., complete complying with standard specification and as directed by the departmental officers	1288.17	Sq.m	258922.00
186.00	Paving the floor with best approved quality fine polished Kota stone slabs of size 600 x 600 and above 20mm thick with machine cut edges laid over a cement mortar bed of 20mm thick using cement mortar 1:3 (One cement and three crushed stone sand) with required Cement Slurry and Mortar Plasticizer fixing the slabs in true right angles with minimum possible width of joints and pointing the joints with white cement mixed with matching colouring pigments and polishing with floor polisher to a high degree of finish etc., complete complying with standard specification and as directed by the departmental officers.(The kota stone slabs and other materials to be used shall be got approved by the Executive Engineer concerned before use on work)	1472.41	Sq.m	273868.00
27.00	Paving the floor with pre-polished concrete anti-skid tiles (Required shape and design) of 20mm thick of approved quality and colour laid in Cement Mortar 1:3 (One Cement and Three crushed stone sand) 20mm thick and pointed with white cement mixed with colouring pigment at the rate of 0.40 Kg. / sq.m., curing, etc., complete complying with standard specification and as directed by the departmental officers. (The make and brand of the tiles should be got approved by Executive Engineer before use on works)	1447.16	Sq.m	39073.00
8.00	Paving the floor with pre-polished concrete anti-skid step tiles (Required shape and design) of 20mm thick of approved quality and colour laid in Cement Mortar 1:3 (One Cement and Three M-sand) 20mm thick and pointed with white cement mixed with colouring pigment at the rate of 0.40 Kg. / sq.m., curing, etc., complete complying with standard specification and as directed by the departmental officers. (The make and brand of the tiles should be got approved by Executive Engineer before use on works)	1576.44	Sq.m	12612.00

Qty	Description	Rate	units	Amount
4.40	Supplying and fixing in position steel balustrades using 20mm square rods spaced at 150mm centre to centre so that the two balustrades in each step shall be placed centrally and the top of balustrades connected with the hand rails (cost of hand rail shall be measured and paid separately) by means of MS flats of size 40mm x 6mm in the groove 40mm x 6mm provided at the bottom of hand rail; the bottom of balustrades shall be fixed on to the top of step concrete. An additional MS flat of size 50mm x 6mm shall be provided at the centre of balustrades connecting all square rods to the entire length including cost of square rods, flat and applying one coat of red oxide primer to the iron surfaces, etc., complete complying with standard specification and as directed by the departmental officers.	2883.77	Rm m ²	12689.00
11.00	Supplying and fixing GI pipe handrails for Differently Abled persons using 50mm dia GI pipe double handrail at a height of 800mm and 900mm from floor level with 25mm thick MS square rods as balusters embedded in the concrete and welded with pipe at 60cm centre to centre as shown in CA Job No. 9123 / 1 including cutting, welding, bending and fixing charges and applying one coat of red oxide primer for MS members as directed by the departmental officers	1665.73	Rm	18323.00
20.00	Supplying and fixing in position best approved of BIS quality PVC rain water down fall pipes having a pressure of 4 kg. / sq.cm including cost of necessary PVC shoe, PVC bend, cast iron gratings of required diameter and special clamps, brass screws, nails, etc., and fixing of cast iron gratings at junction of parapet and the RCC roof slab including finishing neatly etc., complete. The rate shall be inclusive of cast of removable cast iron grating. The PVC pipe shall be fixed in wall with special type of "U" clamp at the centre of the pipe line in addition to those for more than 3.0 metre pipe length, etc., complete complying with standard specification. 110 mm dia	616.58	Rm	12332.00
6.50	Supplying and fixing fine polished cuddapah slab of following thickness for cup-board arrangements including laying to correct alignment with necessary cement mortar and black powder etc, complete complying with standard specification and as directed by the departmental officers 38/ 40mm thick	462.61	Sq.m	3007.00
862.05	Plastering with Cement Mortar 1:5 (One cement and five Plastering Sand, 12 mm thick finishing in all floors including curing etc., complete complying with standard specification and as directed by the departmental officers.	274.73	Sq.m	236831.00

Qty	Description	Rate	units	Amount
371.00	Special ceiling plastering and finishing the exposed surface of all RCC items of work such as slabs, beams, sunshades, fascia, canopy slab, staircase waist slab, landing slab etc., with Cement Mortar 1:3 (One Cement and Three Plastering Sand)) 10mm thick including hacking the surfaces, providing cement mortar nosing, beading for sunshades, staircases, steps, landing slabs and curing, etc., in all floors complying with standard specification and as directed by the departmental officers	315.65	Sq.m	117106.00
535.00	Painting two coats of newly plastered wall surface with ready mixed plastic Interior emulsion paint of first class quality and of approved colour over a priming coat including thorough scrapping, clean removal of dirt, and including necessary plaster of paris putty, wherever required etc., complete complying with standard specification.	257.45	Sq.m	137736.00
356.00	Painting two coats of newly plastered wall surface with ready mixed plastic Exterior emulsion paint of first class quality and of approved colour over a priming coat including thorough scrapping, clean removal of dirt, and including necessary plaster of paris putty, wherever required etc., complete complying with standard specification.	259.00	Sq.m	92204.00
127.00	Painting new iron works such as steel doors, windows, ventilators, window bars, balustrades etc., with two coats of best approved first quality and colour of synthetic enamel paint over the red oxide priming coat in all floors including cost of priming coat etc., complete complying with standard specification. (The make, quality and colour of paint should be got approved by the Executive Engineer before use on works.)	173.37	Sq.m	22018.00
15.00	Providing Black Board in two layers with first layer in C.M. 1:5(One cement and five sand) 20mm thick and second layer in combination mortar 1:1:6 (One cement one lime and six sand) 20mm thick and 50mm width including cost of one coat black oxide paint of approved quality etc., complete complying with standard specification and as directed by departmental officers.	1106.10	Sq.m	16592.00

Sl. No	Qty	Description	Rate	units	Amount
34	17.30	Fabricating, Supplying and fixing in position of steel sheeted windows (Three Leaves) with the following specifications. Outer frames of windows made of 'Z' section F7D of size 33 x 25 x 3mm at 1.419 kg/ m and mullion 'J' section (F4B) of size 46x25x3mm at 2.28kg/m and shutter section of made of F7D of 33x25x3mm at 1.419 kg/m as specified in IS 7452/1990. Each operable shutter should not exceed a width of 600mm to enable separate operations and easy maintenance. The panel of the shutters to be covered with 18 gauge cold rolled sheet of superior quality and welded intact with shutter frames. Horizontal stiffeners using 18x5mm MS Flat at 0.70kg/m at 3 Nos. for each shutter and additional diagonal stiffeners of the same MS flats at all the four corners of each shutters to the suitable length welded to the shutters, for holding the CR Sheets in position firmly 2 numbers of sturdy hinges and one number of handle-cum-latch of special type made with 18x5mm MS flats are rivetted to the shutters at an appropriate height in window. suitable opening is left for its easy operation. a stopper square rod for handle is provided in the mullion section at suitable place to catch the window handle. each window shutter having an adjustable stay made out of 18 x 5mm at 0.70 kg/ m MS flat of length 320mm with three adjustable position. A matching peg is provided in the outer frame of the window at suitable place. 4 Nos. of hold fasts of 120mm length spliced at the ends are welded to the outer frame of the window by using MS flat of 18x5mm at 0.70kg/m, welded to the shutter at two place equivalent from each from top and bottom of the shutter. An MS square bar of 12mm size is welded to the inner face of the window at an equal interval not exceeding 100mm edge between them. All members are	5700.30	Sq.m	98615.00

	Description	Rate	units	Amount
170	Manufacturing, supplying and fixing of Entrance steel doors with the following specification M.S angles of a size 40x40x6mm are used for the outer frames and M.S. angles of size 35x35x5mm for the shutter frames stiffeners with 32x6mm M.S. flat is provided at required intervals in the shutter frames 18 gauge C.R. sheet is laid as panel in the shutter and welded intact for 1/3 bottom portion of the shutter. M.S. flat 18x5mm is welded over the 32x6mm M.S. flat sand witching the CR sheet in between. Additional stiffener with 18x5mm M.S. flat is provided diagonally at the rear side of the shutter. The balance 2/3 portion at top is provided with grill at an average weight of 20 kg/sq.m with 300mm hieght of fixed glazing at top with 3mm thick Pin Headed glass including 6 Nos Steel Parliament Hinges of Size 125mm x 150mm for double leaves shutter to be provided 6nos of holdfasts 200mm in length made of angle section spliced at the ends are welded to the outer frame of the door. Tower bolts 4nos. One the top of each shutter, one at lock rail and the other at the bottom are provided. one aldrip is provided at on appropriate place in the door. 3 Nos of handle are to be provided. A Tie bar is provided at the bottom of the outer frame to prevent twisting of frame during	5202.61	Sq.m	40060.00
174.00	Supplying and fixing mild steel iron grill for windows ventilators and grill gate etc., including one coat of red oxide primer using M.S angle of size 40 x 40 x 6 mm and grill using 20 x 6mm M.S flat and necessary hold fast with M.S angle of size 40 x 40 x 6 mm - 230 mm long spliced at end is to be provided at appropriate places for fixing the grill etc., complete complying with standard specification. The type design for the grills should be got approved by the departmental officers before execution.	106.40	Kg	77034.00

Qty	Description	Rate	units	Amount
198.00	Pre-Construction anti-termite treatment plinth area – surface treatment. stage-I :- Completion of earth work for column footings before laying plain cement concrete 25mm dia Hole spaced at 30cm center to center on both direction will be made at the bottom of earth work and the chemical will be poured in the holes and will be sprayed in the four sides of earth work at the rate of 3 litres of chemical solution (Chlorophyrifos emulsion diluted in ration 1:19 (One emulsion and 19 water per square metre) stage-II :- After filling the basement before laying flooring concrete with filling sand 25mm dia holes to a depth of 450mm will be made inside the basement and the chemical will be poured in the holes at the rate of 3 litres of chemical solution (Chlorophyrifos emulsion diluted in ration 1:19 (One emulsion and 19 water) per square metre payment shall be made after completion of 3 stages. Peripheral treatment stage-III. On completion of building and leveling the outer area adjacent to the walls column ground ponds of size (900X300 mm will be filled in the ponds at the rate of 3 litre of chemical solution per Rm payment shall be made after completion of 3 stages. Stage-IV. Spraying termite solution around the building (Out side of the building) by making crowbar holes around the building before laying the plinth protection. This holes has to	136.00	Sq.m	26928.00
15.00	Supplying and Installation of Ceramic steel chalk writing board with the following specification. GI sheet of 2mm thickness is fixed with the wall side over the GI sheet necessary special adhesive is spreaded and 9mm MDF Board is fixed on this GI sheet 0.40mm thick ceramic chalk board is provided over the MDF board and the whole arrangements are fixed to the frame using heavy anodised aluminium section and chromium plated provided in the corners. The whole arrangements are fixed to the wall using wooden Plugs, screws, etc. complete complying with standard specification	6000.00	Sq.m	90000.00
5.00	Supplying and Fixing MS Ladder width 45cm using 50x50x6mm MS Angle.	1609.68	Sq.m Rm	8048.00
7.60	Providing Cup-board Shutter with frame using termite water proof plywood of 19mm thick over which laminated sheet of 0.8mm thick fixed inside the shutter and 1mm thick fixed in the outside of the shutter using fevicol along with necessary furniture fittings, such as, hydraulic hinges, tower bolt, handles, multi purpose locks etc., as directed by the Departmental Officers. The design pattern, water proof plywood, laminate sheet and other materials should be got approved from the Executive Engineer before use on work.	5047.00	Sq.m	38357.00

Qty	Description	Rate	units	Amount
38.00	Manufacturing, supplying and fixing in position plain cement concrete precast pavement slab of size 450mm x 450mm of 50mm thick in Cement Concrete 1:2:4 (One cement, Two crushed stone sand and Four jelly) using 20mm HBG stone jelly including cost of moulding charges, casting of slab, finishing, curing, fixing and pointing the slab with CM 1:3 (One Cement and Three Sand) to full depth of slab etc., complete complying with standard specification and as directed by the departmental officers	531.58	Sq.m	20200.00
	Supplying and Fixing of Aluminium Dye Cast Letters of approved size and colour. The colour treatment process is achieved with MRF colour coat and then the processed coloured layer is set into the kiln for the heat treatment process for the following sizes Aluminium Dye Cast Letters 9" size			
3.00	9" Aluminium dye cast letter	1179.00	Nos	15327.00
3.00	6" Aluminium dye cast letter	748.00	Nos	32912.00
1.00	Supplying and Fixing of Tamil Stainless Steel Letters Emblem (15")	12975.00	Nos	12975.00
3.00	Supply and fixing of stored pressure ABC (Mono Ammonium Phosphate) Powder Type Fire Extinguisher of 6 kg. capacity as per IS:15683 with pressure gauge, discharge hose & control nozzle, wall mounting bracket, safety clip etc., including conveyance, all incidental charges, necessary scaffolding and re-doing the dismantled portions to its original condition wherever found necessary etc, complete as per standard specification and as directed by the Departmental Officers. Make: EXCELLENT / SAFETY FIRST / EQUIVALENT	5248.00	Nos	15744.00
	Total Civil work			5504633.00
	Provision for GST 18%			990834.00
	Total Civil work including GST			6495467.00

Sl. No.	Qty	Description	Rate	units	Amount
40	38.00	Manufacturing, supplying and fixing in position plain cement concrete precast pavement slab of size 450mm x 450mm of 50mm thick in Cement Concrete 1:2:4 (One cement, Two crushed stone sand and Four jelly) using 20mm HBG stone jelly including cost of moulding charges, casting of slab, finishing, curing, fixing and pointing the slab with CM 1:3 (One Cement and Three Sand) to full depth of slab etc., complete complying with standard specification and as directed by the departmental officers	531.58	Nos	20199.00
41		Supplying and Fixing of Aluminium Dye Cast Letters of approved size and colour. The colour treatment process is achieved with MRF colour coat and then the processed coloured layer is set into the kiln for the heat treatment process for the following sizes Aluminium Dye Cast Letters 9" size			
a	13.00	9" Aluminium dye cast letter	1179.00	Nos	15327.00
b	44.00	6" Aluminium dye cast letter	748.00	Nos	32912.00
42	1.00	Supplying and Fixing of Tamil Stainless Steel Letters Emblem (15")	12975.00	Nos	12975.00
43	3.00	Supply and fixing of stored pressure ABC (Mono Ammonium Phosphate) Powder Type Fire Extinguisher of 6 kg. capacity as per IS:15683 with pressure gauge, discharge hose & control nozzle, wall mounting bracket, safety clip etc., including conveyance, all incidental charges, necessary scaffolding and re-doing the dismantled portions to its original condition wherever found necessary etc, complete as per standard specification and as directed by the Departmental Officers. Make: EXCELLENT / SAFETY FIRST / EQUIVALENT	5248.00	Nos	15744.00
					55046.00
		Total Civil work			99083.00
		Provision for GST 18%			64951.67.00
		Total Civil work including GST			

8.8.12 14/7/25
Assistant Engineer, P.W.D.,
Buildings (C&M) Section,
Singampunari.

Assistant Executive Engineer, P.W.D.,
Buildings (C&M) Sub Division,
Karaikudi.

Executive Engineer, P.W.D.,
Buildings (C&M) Division,
Sivagangal

14/7/25 14/7/25


14.7.25
CHIEF EDUCATIONAL OFFICER
SIVAGANGAL - 630 562.



GENERAL ABSTRACT

NAME OF WORK	"CONSTRUCTION OF 3 CLASSROOM BUILDING IN GOVERNMENT HIGHER SECONDARY SCHOOL AT A.MITHRAVAYAL IN SIVAGANGAI DISTRICT."
--------------	---

(AMOUNT IN RUPEES)

I	TOTAL CIVIL WORKS	55,04,633
	ADD GST 18%	9,90,834
	TOTAL VALUE OF CIVIL WORKS(INCLUDING GST @ 18%)	64,95,467
II	LUMPSUM PROVISIONS	
1	PROVISION FOR INTERNAL AND EXTERNAL ELECTRIFICATION WITH (INCLUDING GST @ 18%)	3,20,000
2	PROVISION FOR EB SERVICE CONNECTION CHARGES	10,000
3	PROVISION FOR SOIL INVESTIGATION	50,000
4	PROVISION FOR RAIN WATER HARVESTING AND ADDITIONAL AMENTITIES	3,00,000
5	PROVISION FOR FRONT ELEVATION	50,000
6	PROVISION FOR TENDER ADVERTISEMENT CHARGES	10,000
7	PROVISION FOR LPA CHARGES	50,00
8	PROVISION FOR PHOTOGRAPHIC CHARGES AND DOCUMENTATION CHARGES	500
9	PROVISION FOR INAUGRAL FUNCTION, FOUNDATION STONE LAYING	13,000
10	PROVISION FOR LABOUR WELFARE FUND at 1.00 %	74,220
11	PROVISION FOR P.S CHARGES AND CONTINGENCIES	80,000
12	PROVISION FOR UNFORESEEN ITEM OF WORKS	13,813
	TOTAL	Rs.74,22,000/-
	(RUPEES SEVENTY FOUR LAKHS TWENTY TWO THOUSAND ONLY)	


SUPERINTENDING ENGINEER, BWD,
BUILDINGS (C & M) CIRCLE, SIVAGANGAI


14/7/2014

14-2-2014

Name of work:
Construction of 3 Class rooms building in Govt. Hr. Sec. School at A.Mithravayal in
Sivagangai district.

S.No	Description	Amount
I	Civil Works including GST	6495457.00
II	<u>Lumpsum provision</u>	
1	Provision for Internal and External Electrification (including GST)	320000.00
2	Provision for EB Service connection	10000.00
3	Provision for Soil Investigation	40000.00
4	Provision for Rain water Harvesting and additional amenities	280000.00
5	Provision for Front elevation	40000.00
6	Provision for Tender Advertisement charges.	10000.00
7	Provision for LPA charges.	50000.00
8	Provision for Photographic charges & documentation charges	500.00
9	Provision for Inaugural function, foundation stone laying.	13000.00
10	Provision for Labour welfare fund @ 1%	74220.00
11	Provision for P.S charges and Contingencies	78000.00
12	Provision for Unforeseen item of works	10813.00
	TOTAL	7422000.00

(RUPEES SEVENTY FOUR LAKHS AND TWENTY TWO THOUSAND ONLY)

5.8/12
14/1/25
Assistant Engineer, P.W.D.,
Buildings (C&M) Section,
Singampunari.

Assistant Executive Engineer, P.W.D.,
Buildings (C&M) Sub Division,
Karaikudi.

Executive Engineer, P.W.D.,
Buildings (C&M) Division,
Sivagangai.

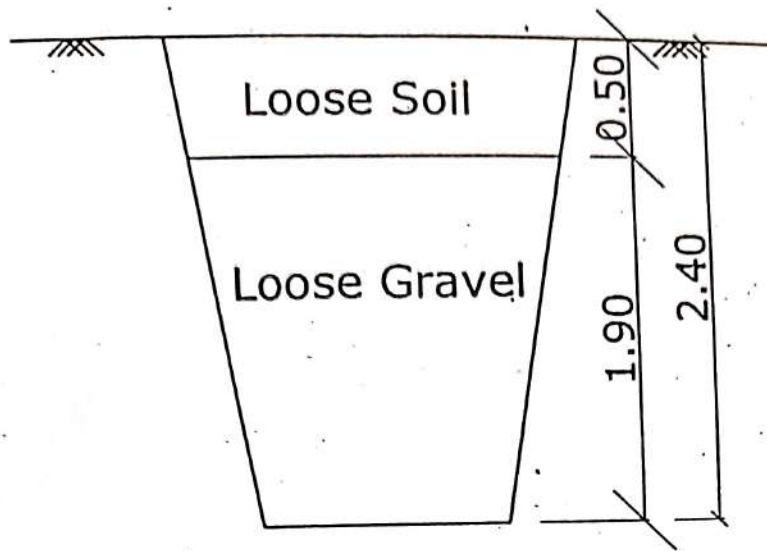
CHIEF EDUCATIONAL OFFICER
SIVAGANGAI - 630 562.

Executive Engineer
Electrical Division, P.W.D.,
Sivagangai.

SuperIntending Engineer, PWD
Buildings (C&M) Circle
Sivagangai - 630 561.

SuperIntending Engineer, PWD
Buildings (C&M) Circle
Sivagangai - 630 561

TRIAL PIT PARTICULARS



CERTIFICATE

Certified that the trial pit particulars furnished are found correct as per investigation.

S. S. M.
14/7/25
Assistant Engineer, P.W.D.,
Buildings (C&M) Section,
Singampunari.

[Signature]
Assistant Executive Engineer, P.W.D.,
Buildings (C&M) Sub Division,
Karaikudi.

[Signature]
Executive Engineer, P.W.D.,
Buildings (C&M) Division,
Sivagangai.

Pm.
14/7/25